

**AUTHOR(S):**

**TITLE:**

**YEAR:**

**Publisher citation:**

**OpenAIR citation:**

**Publisher copyright statement:**

This is the \_\_\_\_\_ version of an article originally published by \_\_\_\_\_  
in \_\_\_\_\_  
(ISSN \_\_\_\_\_; eISSN \_\_\_\_\_).

**OpenAIR takedown statement:**

Section 6 of the "Repository policy for OpenAIR @ RGU" (available from <http://www.rgu.ac.uk/staff-and-current-students/library/library-policies/repository-policies>) provides guidance on the criteria under which RGU will consider withdrawing material from OpenAIR. If you believe that this item is subject to any of these criteria, or for any other reason should not be held on OpenAIR, then please contact [openair-help@rgu.ac.uk](mailto:openair-help@rgu.ac.uk) with the details of the item and the nature of your complaint.

This publication is distributed under a CC \_\_\_\_\_ license.

\_\_\_\_\_



**Multi-storey residential buildings and occupant's behaviour during fire evacuation in the UK: Factors relevant to the development of evacuation strategies.**

Journal:	<i>International Journal of Building Pathology and Adaptation</i>
Manuscript ID	IJBPA-08-2017-0033.R3
Manuscript Type:	Original Article
Keywords:	evacuation, lifts, egress, human behaviour, decisions, multi-storey

SCHOLARONE™  
Manuscripts

1  
2  
3 Multi-storey residential buildings and occupant's behaviour during fire evacuation in the UK:  
4 Factors relevant to the development of evacuation strategies.  
5

6  
7 Michael Gerges<sup>a</sup>, Sholto Penn<sup>b</sup>, David Moore<sup>c</sup>, Chris Boothman<sup>d</sup> Champika Liyanage<sup>e</sup>.

8  
9 <sup>a</sup>Michael Gerges, (School of Engineering, University of Central Lancashire, Preston, UK)

10 <sup>b</sup>Sholto Penn, (School of Construction, Lancaster University, Lancaster, UK)

11 <sup>c</sup>David Moore, (Scott Sutherland School of Architecture and Built Environment, Robert Gordon University, Aberdeen, UK)

12 <sup>d</sup>Chris Boothman (School of Engineering, University of Central Lancashire, Preston, UK)

13 <sup>e</sup>Champika Liyanage (School of Engineering, University of Central Lancashire, Preston, UK)  
14  
15  
16  
17  
18

## 19 Abstract

20 **Purpose** – The paper aims to investigate human behaviour during fire evacuations in multi-  
21 storey residential buildings through a focus on the challenges and obstacles that occupants  
22 face. Any variations in response behaviours that are relevant to the evacuation  
23 strategies/plans in the UK context of occupancy typical of multi-storey buildings in large  
24 cities.  
25

26 **Design/methodology/approach** – A literature review was conducted to identify the factors  
27 occupants face and also the decision-making of occupants regarding methods of egress. A  
28 mixed research method was adopted using interviews and a questionnaire survey. The  
29 findings from the interviews and survey are benchmarked against the information gathered  
30 from the literature review.  
31  
32

33 **Findings** – The paper identifies various challenges that occupants face when evacuating a  
34 multi-storey residential building. In terms of the decision-making process, the research results  
35 evidence that occupants could be given more information on the evacuation procedures  
36 within their specific building. The paper also finds that occupants remain reluctant to use a  
37 lift during evacuation in fire event, irrespective of any signage clearly stating that is  
38 appropriate to do so in the context of modern lift technology.  
39

40 **Originality/Value** – This paper contributes to the body of knowledge available on the  
41 evacuation of multi-storey buildings located in large cities within the UK, outlining potential  
42 areas for future research, focused on providing an insight of the behavioural decisions made  
43 by the occupants make when evacuating a building in the event of a fire.  
44  
45

46 **Keywords** - Evacuation; lifts; egress; human behaviour; decisions; multi-storey  
47  
48  
49

## 50 Introduction

51 Fire safety has consistently been a vital consideration when designing multi-storey buildings  
52 and, given the specific environment of such buildings, human behaviour during an evacuation  
53 process has long been considered a key factor in a successful evacuation (Proulx, 2002).  
54 Sekizawa *et al* (1999) suggested that some key factors are the method of which occupants  
55  
56  
57  
58  
59  
60

1  
2  
3 react to fire cues, the motives they are given to commence evacuating, and the choice of  
4 evacuation route (typically choosing their usual route of moving around the building or a  
5 route identified as being 'safe' rather than one that was close). While there is a considerable  
6 body of literature relevant to the evacuation of multi-storey buildings, some of this is  
7 inevitably dated, particularly in the context of materials development, enhancements to  
8 existing technologies, emerging new technologies and a deeper understanding of the  
9 psychology of human behaviour, particularly in the context of group dynamics. Ronchi and  
10 Nilsson (2013), for example, considered not only the individual use of egress components but  
11 also the combined use of such egress components as stairwells and elevators along with other  
12 means of escape that would not be typically regarded as 'traditional' (sky-bridges,  
13 helicopters, etc.). However, Nilsson and Kinteder's (2015) postulates that data on the  
14 behaviour of occupants in a fire situation are generally collected using case studies is  
15 consistent with the majority of the literature reviewed. Nilsson and Kinteder further suggest,  
16 that controlled experiments can also be used to establish relationships in this context. In  
17 addition, the use of interview techniques, as used by Shields *et al* (2009), appears to be a  
18 relatively common method used in fire evacuation occupant behaviour studies.

19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29 Human behaviour within a fire has been examined through both the review of past evacuation  
30 situations, and simulations. Past evacuations which suggests that any decisions made within  
31 the conditions are a result of a decision-making process and not based on random actions  
32 (Kuligowski, 2009) and the use of evacuation models that can predict occupant evacuation  
33 behaviour. In addition to this, Proulx (2001) opines that the behaviour of the occupants will  
34 depend on the characteristics of not only the occupant, but also the building and the fire.

35  
36  
37  
38  
39 Proulx (2001) further states that despite adequate fire safety systems being in place, they can  
40 often fail due to inaccurate predictions and expectations of how occupants will behave during  
41 a fire. Barber (2010) asserted that occupants' behaviour differs when they class themselves as  
42 being at 'home', at 'work' or in a social space; when occupants regard themselves as being at  
43 'home' they may show a reluctance to evacuate what they perceive to be a safe space until  
44 such point as they are sufficiently motivated by a perception of being directly threatened by a  
45 fire.

46  
47  
48  
49  
50 Using stairs as the only route of egress during a fire can lower the evacuation speed as well as  
51 tire the occupants especially the elderly and sick (Chen *et al* 2014). This theory is supported  
52 by Heyes (2009) who explains that during an evacuation of a multi-storey building, using  
53 only stairs can be impractical due to the ageing population and obesity problems within the  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 UK. To improve this problem, lifts have been proposed and used as methods of egress in  
4 multi-storey buildings. Galea (2014) suggests that past studies show that building evacuation  
5 speed can be increased by 50% through the combination of lifts and stairs. However, this  
6 figure is based on an assumption that if lifts are available then they will actually be used by  
7 occupants as a means of egress during an evacuation. This assumption can be dangerous, as  
8 Noordermeer (2010) suggests that various factors must also be considered such as how  
9 people respond to an emergency, how they interpret the information and directions given and  
10 will the fire escapes be used for the intended purposes.  
11  
12  
13  
14  
15

16 This paper will examine the possible behavioural decisions occupants could make when  
17 evacuating a building. The Grenfell disaster exemplifies how occupants behaviour can be  
18 affected by their interpretation of the evacuation instructions received when they are in a  
19 situation of interpreting such instructions without any 'expert' or authoritative input (such as  
20 they may rely on when being 'marshalled' out of a work environment) within their own  
21 homes that contain items of both financial and emotional value (LeGood, 2017). A further  
22 consideration is one that some may regard as being 'sensitive' (a possibility that may explain  
23 the relative lack of data and research in this area) is the nature of occupancy in multi-storey  
24 buildings typical of large UK cities. Whilst it is fully acknowledged that relevant and reliable  
25 data is scarce, fires such as that at Grenfell Tower have raised awareness of the possible  
26 extent of cultural diversity present in such buildings (Bulman, 2017). Therefore, the aim of  
27 this research is to explore perspectives on human behaviour during a fire evacuation of a  
28 multi-storey residential buildings in the UK.  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39

### 40 **Fire safety in multi-storey buildings**

41 High rise buildings are complex and therefore require extensive fire safety measures to be  
42 incorporated when designing the building. Heffelmire (2016) states that a key challenge for  
43 providing fire safety in a multi-storey building is ensuring that all fire safety systems such as  
44 alarms, smoke control and egress systems can sufficiently work together in an integrated  
45 system manner. Bengtsson *et al* (2008) agrees that the consequences of any failure of a  
46 building's fire-related technical systems and the time of the fire service's response both  
47 become more critical in multi-storey buildings. As such buildings have tended to become  
48 ever-taller the challenges presented to both the fire service (such as insufficient reach of fire  
49 ladders – in 2017 the longest reach 'ladder' in the UK (the Ariel Ladder Platform) had a  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 reach of 42m; 25m shorter than the height of Grenfell Tower) and their occupants also  
4 increase.  
5

6  
7 Cowlard *et al* (2013) suggests that implementing a performance based design for each multi-  
8 storey building allows a rational approach to both life safety and property protection  
9 objectives. Identification of specific goals, objectives and performance requirements will  
10 allow an engineer the scope to demonstrate achievement of a required performance. When  
11 providing fire safety requirements for multi-storey buildings, it is vital to ensure a thorough  
12 study has been undertaken (Edgar and Chow, 2011). Moreover, when designing a multi-  
13 storey building in the UK, the structure must adhere to certain regulations and standards to  
14 ensure safe design and construction of the building. The current regulations in the UK are  
15 Approved Document B of the Building Regulations 2010 which defines a tall building as any  
16 with a top floor height of 45 metres or more. These documents provide legal guidance on fire  
17 safety such as stairway widths, ventilation, fire doors and escape routes. Before 2005, fire  
18 safety was covered by circa seventy pieces of legislation such as the Fire Precautions Act  
19 1961. It was decided that the numerous forms of legislation should be simplified, thus leading  
20 to the creation of the Regulatory Reform (Fire Safety) Order 2005 (Firesafe.org.uk, 2011).  
21 For multi-storey residential properties, the Housing Act 2004 must also be adhered to.  
22  
23  
24  
25  
26  
27  
28  
29  
30

31 The World Trade Centre (WTC) events of September 11<sup>th</sup> 2001 led to a concern for  
32 occupants when evacuating a multi-storey building; the event provided a trigger to reconsider  
33 the use of lifts (elevators) for evacuation (Proulx, 2004). Noordermeer (2010) agrees that the  
34 events of September 11<sup>th</sup> 2001 acted as a catalyst to discuss the implementation of lifts in  
35 more depth.  
36  
37  
38  
39

40 The use of lifts for evacuation in high rise buildings can reduce evacuation times from 2-3  
41 hours to 15-30 minutes (Siikonen and Hakonen, 2002). Older, existing lifts were not designed  
42 for use in fire situations and consequently the standard instruction to occupants was that, if a  
43 fire should occur, they should use the stairs, not the lifts, as an egress route (Haitao, Leilei  
44 and Juizi, 2012). However, with the improvement of lift performance it is now becoming  
45 feasible to use this technology as a means of evacuation. Nonetheless, Klote *et al* (1992)  
46 suggests that designing and constructing suitable lifts for evacuation is, in effect, only 50% of  
47 the job; occupants of the building must also be prepared to use the lifts in order to ensure a  
48 reduced evacuation time. It should be noted that there are numerous definitions for a variety  
49 of 'tall' buildings, ranging from multi-storey to mega-tall (Designing Buildings, 2017) and  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 that these may differ between countries. In this research the term multi-storey is used as a  
4 generic descriptor of any building that is one storey or greater in height (so as not to exclude  
5 the occupants of any specific height (storeys) of building). However, it is accepted that, in the  
6 UK, the general expectation would be that the majority of multi-storey buildings would be  
7 described as being in the 1-9 storey group, although there is no data in the literature that  
8 conclusively evidences this. In addition, the 'normal' expectation of a number of storeys  
9 within which the majority of tall buildings would sit varies from country to country. A recent  
10 analysis of new tall building construction in London, for example, found that the majority of  
11 such buildings were in the 20-29 storey category (Hearn, 2015). London can also be shown  
12 to contain at least 618 buildings of 10 storeys or greater, whereas New York has at least  
13 6,080 such buildings (Skyscraperpage, 2017). Given that many may regard New York as the  
14 spiritual home of the skyscraper, it may be surprising that the median number of floors for  
15 such buildings is a relatively low 16 (Hickey, 2014).  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25

#### 26 **Human behaviour during a fire evacuation**

27 Although adequate fire safety systems are used in most buildings today, fire can still occur;  
28 during the period 2009-2013, there were an average of 14,500 fires, 40 deaths and 520  
29 injuries per year in US multi-storey buildings (Ahrens, 2016). Proulx (2001) suggests that  
30 such deaths and injuries largely result from incorrect assumptions with regards to the fire-  
31 related behaviour of the occupants of such buildings. In the context of an overall fire situation  
32 (typically consider to comprise three phases: Phase 1 – period between a fire starting and  
33 being detected; Phase 2 – period between occupants being aware of a fire and their making  
34 the decision to leave the building; Phase 3 – period between the evacuation commencing and  
35 the full evacuation of a building. This should not be confused with the concept of a phased  
36 evacuation as considered by Adler (2017)).  
37  
38  
39  
40  
41  
42  
43

44 A study of 225 multi-storey occupants showed that 93.33% of those surveyed believed that  
45 there would be panic during a fire situation (Cordeiro *et al*, 2011), a figure which rose to 96%  
46 within the subset of the sample who had actually experienced such a fire. Lo *et al* (2000),  
47 however suggest that panic is a misconception and research has shown that, during the initial  
48 stages of a fire, occupants behave in a controlled and rational manor. This theory is supported  
49 by Proulx (2001) who explains that there is little evidence of panic in actual fire situations. In  
50 addition, Winerman (2004) argues that 'panic' is simply not the most appropriate description  
51 for the feeling that occupants report experiencing – they are fearful; a state of mind that can  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 result in some unexpected behaviours, such as trying to exit by whatever route they entered  
4 the building. If greater attention was given to human behaviour during a fire, then many  
5 unexpected behaviours could be eradicated. Once occupants have heard the alarm, seconds or  
6 minutes can pass before they begin evacuating (Proulx, 2003).  
7  
8

9  
10 One of the arguably more unexpected behaviours that has been identified is that people will  
11 tend to try and help each other (altruism), particularly when they are familiar to each other.  
12 The altruistic aspect of evacuation behaviours has been known about for some time (the  
13 Social Categorisation Theory (Tajfel and Turner, 1979) and the Social Identity Model  
14 (Reicher, 1987) of crowd behaviour, for example, identified not only altruism but also self-  
15 sacrifice) and yet the expectation of panic remains a common belief. This belief appears, at  
16 least in part, to be an outcome of overly-exaggerated reporting by media that seem unable to  
17 differentiate between fear and panic (Galea, 2012).  
18  
19  
20  
21  
22

23 Human behaviour during a fire evacuation of a multi-storey residential building differs from  
24 that of an occupant in a commercial multi-storey building, due to the form of construction  
25 used in each case. People will react when they perceive a fire cue such as smell, noise from  
26 other occupants, sight of flames or smoke, or a fire alarm (Kuligowski, 2009). As residential  
27 occupants will generally live in fire-tight units, they are unlikely to perceive cues that would  
28 be available to commercial occupants (in a typical open-plan office space) such as smell,  
29 sight or noise from other occupants who are already aware of a fire; occupants need to be  
30 informed of the fire before they can react (Lo *et al* 2000).  
31  
32  
33  
34  
35  
36

37 Galea (2014) proposes that research into the evacuation during the World Trade Centre  
38 attacks of 2011 showed that the occupants did not have adequate information when  
39 evacuating the building. For example, the occupants evacuating the World Trade Centre  
40 would have not been specifically informed to follow the directions provided by emergency  
41 signage; only 38% of occupants evacuating 'see' the emergency signs when evacuating, but  
42 100% of the occupants will follow the signs if they see them, thereby suggesting that  
43 emergency signage is not sufficiently effective in securing occupants' attention. This problem  
44 may simply be that, as Johnson (2005) argues, occupants will ignore emergency signage and  
45 instead retrace the route in which they entered the building. The decision to use a familiar  
46 route rather than follow the signs and take an unfamiliar (and therefore presenting an  
47 unknown level of uncertainty) path is a feature that occurs often that leads to many accidents.  
48 This has, in turn, led to an increasingly sophisticated approach to the incorporation of risk  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60



perception (RP) models in connection with seeking to more fully understand the decision-making behaviour of occupants during a fire situation. Kinateder *et al* (2015), for example, suggest that RP is essentially the personalisation of risk within a specific event context, and is a process that, as with most human processes, is subject to cognitive biases and emotions. If such a RP model is accepted it may provide insights into the ‘value’ of familiarity (as a cognitive bias?) within the decision-making process; commercial building occupants are (in many countries) legally required to engage in regular fire evacuation drills (thereby ‘creating’ a familiar exit path regarding which they have minimal uncertainty), whereas private multi-storey building occupants are typically only exposed to evacuation signage (rather than becoming familiar with an evacuation route).

Traditionally it is assumed that lifts should not be used as a method of evacuation. However, increasingly this idea has been discarded due to the need for faster and more efficient (than the traditional stairwell routes) forms of evacuation (Ronchi and Nilsson, 2013). To sufficiently design a lift system for evacuation use, designers must possess an understanding of the occupant’s behaviour when using the lifts; a common assumption is that occupants will wait indefinitely for a lift to arrive, which in fact does not truly reflect the behaviour of people in that situation (Heyes, 2009). In addition, fire engineers often assume that if lifts are available to occupants and they are made aware that they are safe to use, then they will use them. However, a survey of 424 people by Galea (2014) showed that even if occupants were well informed and the lifts were safe to use in a fire situation, only 33% of people would consider using them. This finding may represent a behavioural change from the findings of an earlier study by Canter (1996), who surveyed a sample of 77 people who had been involved in a fire evacuation where lifts were available for evacuation – 85% people used them. As previously mentioned, however, decision-making in a fire situation is a complex interaction between cognitive biases, personal emotions, quality of information available, and familiarity that arguably results in varying perceptions of risk, and therefore varying decisions regarding evacuation behaviour.

Heyes (2009) proposes that the main concerns occupants have for not using lifts to evacuate a building are:

- Being trapped in the lift if the power fails;
- Concern that smoke or fire may enter the lift;
- The possibility that the lift could fail causing the lift to fall,

- The time it takes to wait for the lift.

Hall (2010) agrees with the waiting time concern, suggesting that remaining stationary while waiting for the lift can easily agitate many occupants (again, fear, rather than panic). Moreover, the probability that an occupant could reduce the evacuation time by waiting for a lift, rather than immediately using the stairs, largely depends on the floor that the occupant is on; the higher the floor, the more probable the evacuation time will be shorter when using a lift travelling at a typical speed. A 2009 guidance document for the Department for Communities and Local Government (DCLG) compared typical speeds for stairwell and lift evacuation routes, and found that, as the evacuation starting point moved up the building, the lift provided an increasingly faster evacuation than use of the stairwell, even when the larger 'carrying' capacity of the stairwell (along with other factors) was taken into account (Charters, Fraser-Mitchell, 2009). Even though such information is known to fire engineers, the information provided to occupants is typically minimal (Hall, 2010). Galea (2014) conducted a survey of which 424 participants were asked about the amount of time they were willing to wait for a lift during an evacuation, the majority of people survey specified a finite time that they would be willing to wait, depending on the floor height, crowd density and the expected (not the calculated, as per Charters and Fraser-Mitchell (2009), for example) waiting time.

Proulx *et al* (2009) suggests that several factors can influence whether an occupant uses a lift for building evacuation, varying from person to person depending on the occupant's knowledge of the egress routes and previous experiences of evacuations. Research has shown that most decisions are based on what the occupant estimates (typically as a non-expert, therefore the validity of such an estimate can be regarded as low) is that fastest route to evacuate the building. A method of increasing the efficiency of an evacuation is by displaying the estimated evacuation of both the stairs and lifts. This will allow the occupants to make an informed decision.

## Methodology

To achieve the research aim both quantitative and qualitative methods were used, and both interviews and questionnaires were utilised to collect data for the research, with both adopting an essentially semi-structured approach. This allowed for a more comparative approach to the analysis of the data / information gathered than would be the case with an interview or questionnaire only methodology. In addition, an expert evaluation exercise with

respect to the initial questionnaire design (informed by relevant literature) was carried out as a means of establishing if any questions needed to be edited/removed or added. Both the interview and questionnaire designs are discussed in more detail in the following sections.

### Questionnaire design

Following research into questionnaire techniques and design the researchers decided on a questionnaire design comprising both open and closed questions in the manner of Fridolf and Nilsson (2012), who combined closed and open approaches within a single instrument when studying fire safety in underground rail transportation systems. The questionnaire also included a section that the participants could use to comment on anything regarding the research. A total of 72 people completed the questionnaire, the participants were occupants of multi-storey buildings, and were constituted as samples of individuals that had or had not been involved in a real fire evacuation situation, thereby representing two data sets to facilitate comparison. By comparing the two situations, an insight can be gained into fire situation behaviours of individuals who have experienced an evacuation, and therefore 'know' how they will react, as opposed to individuals who have not had that experience and therefore believe how they will react.

The questionnaire and interview were designed so as to provide insights, from both the expert and non-expert perspectives, on key issues identified within the literature. These issues can be summarised as covering five areas:

- Challenges facing evacuees during a fire situation;
- Quantity of information provided to evacuees;
- Extent of occupant reluctance to evacuate immediately;
- Factors affecting occupant decision-making during an evacuation;
- Extent of evacuee reluctance to use lifts, even after being informed it is safe to do so.

The questionnaire was designed to be completed as an online survey thereby allowing a large number of participants to complete the questionnaire, whereas the interview was intended to be undertaken by a small number (three) of experts from different countries.

Prior to releasing the questionnaire it was evaluated by relevant experts in the field of the subject, so as to ensure the validity of the questions before being released to survey participants. The evaluation identified some questions as difficult to understand and therefore in need of simplification to ensure the relevance of any answers. In addition, some questions

1  
2  
3 required a small degree of re-wording, and it was suggested that the total number of questions  
4 needed to be reduced. A final suggestion was that some question response categories should  
5 be changed so as to facilitate analysis of the answers. All of these actions were implemented  
6 to ensure the final questionnaire was clear and able to supply more relevant results.  
7  
8  
9

### 10 11 **Interview design**

12 The interview method was intended to complement the questionnaire in that it focused on  
13 gathering the expertise of fire engineering experts, while the questionnaire focused on non-  
14 experts (the occupants). As stated previously, the questionnaire was intended to be as  
15 available as possible to non-experts, so as to collect a large data set. The interview, however,  
16 took the opposite approach in that it was completed by three experts. In this context, there is a  
17 need to acknowledge the debate concerning the relative 'value' of expert and non-expert  
18 knowledge. Rae and Alexander (no date), for example, note that, when safety-related risk is  
19 the focus, "... the opinions of experts are given greater weight than the opinions of non-  
20 experts." By obtaining the responses of both experts and non-experts with regard to a number  
21 of specific issues this research aimed to determine the extent of any difference in terms of  
22 knowledge (where knowledge (applied information) is considered to be the combination of  
23 data (measurements) and information (data given meaning) (Paunović, 2008)) about those  
24 issues.  
25  
26  
27  
28  
29  
30  
31  
32  
33

34 Arguably the key aspect of value applicable to this research is that experts and non-experts  
35 (novices) learn differently from what appears to be essentially the same experience. In a  
36 multi-storey building fire situation, individuals can be assumed to base their decision-making  
37 on their existing knowledge – do not use the lifts, for example; an expert may well have  
38 appropriate knowledge to recognise a 'safe' lift, whereas a non-expert may rely on their  
39 knowledge of having been instructed that lifts should not be used during a fire situation. In  
40 each case, the behavioural outcome would differ. However, the expert typically has the  
41 luxury of making a behavioural decision whilst accessing relevant data and information  
42 (knowledge) in a safe environment. In comparison, the non-expert sample within this  
43 research were expected to evidence relatively little knowledge (in terms of equivalency to the  
44 experts) and also be affected by the immediacy (in terms of both their environment and the  
45 perception of a possible threat) of the required decision. Weber and Chapman (2005), for  
46 example, investigated the possibility of a relationship between the time available to make a  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 decision and the level of certainty/uncertainty about that decision; does delaying a decision  
4 (such as when to leave a dwelling and commence evacuation) create uncertainty?  
5

6 Yin (2009), Kumar (2014) and Saunders (2015) concur and postulate that a semi-structured  
7 interview to be the most efficient method of interview through the use of focused questions.  
8 Several question were recognised as possible to be answered by a simple 'yes' or 'no' (such  
9 as: Are occupants provided with sufficient information on evacuation procedures?), although  
10 the expectation was that the probability of this happening was low. However, the interviewer  
11 used such questions in combination with the scope to probe the (expert) interviewee for more  
12 in-depth knowledge in the event that their answer was no more than a 'yes' or 'no'. The  
13 interviews were designed consisting of five focused questions, with three fire engineering  
14 experts invited to participate as interviewees.  
15  
16  
17  
18  
19  
20  
21  
22  
23

#### 24 **Data analysis**

25  
26 The questionnaire findings are presented as a series of graphs showing the occupants  
27 responses. Where appropriate, the responses were analysed using the Relative Importance  
28 Index formula (Figure 1), as created using Microsoft Excel.  
29  
30

31  
32 Insert Figure 1 here.  
33

34 With n5 = highly concerned, n4 = slightly concerned, n3 = neutral, n2 = not really concerned  
35 and n1 = not at all concerned. The occupants' answers were inputted into Microsoft Excel  
36 and were checked thoroughly to ensure no inputting errors had occurred. The interviews were  
37 conducted through an online audio conversation, and subsequently transcribed in readiness  
38 for the application of the content analysis technique.  
39  
40  
41  
42  
43

#### 44 **Results, analysis and discussion**

45  
46 The purpose of this study was to explore human behaviour during a multi-storey residential  
47 fire evacuation situation, the decisions occupants make during such a situation, and their  
48 choice of egress methods. The data and information gathered from the questionnaire  
49 responses and interviews was then analysed in accordance with the methodology discussed  
50 previously. The process of distributing (online) the questionnaire and then collecting data and  
51 information from the responses took approximately 2 weeks. As part of this process it was  
52  
53  
54  
55  
56  
57  
58  
59  
60

determined that the questionnaire typically took approximately 10 minutes to complete, and that a total of seventy-eight questionnaires were completed.

### Questionnaire results

Q1. Established the age bracket of each participant, and the building floor on which they resided. Figure 2 shows the results of the age brackets of participants; the majority of respondents were between the ages of 25-34.

Insert figure 2 here.

Figure 3 displays the floor of the building on which the occupants lived; 62.82% of occupants resided between floors 1-9. The results also evidenced that there were 0% of respondents living on floors 50 or above.

Insert Figure 3 here.

Q3. Asked if the participant had previously been involved in a real-life fire evacuation situation while living in a multi-storey building; 30.77% of respondents confirmed they had been involved in a real fire evacuation situation. This could affect the occupants' decision, as it would reasonably be expected that occupants with previous experience of fire evacuation may make different decisions to those that have not. Moreover, Cordeiro *et al* (2011) surveyed 225 people and asked the occupants that had been previously involved in a fire evacuation situation if their reactions would be the same (if they were faced with a further fire evacuation situation) and 54% answered affirmatively.

Q4. Investigated the decisions that participants make during an emergency evacuation of a multi-storey residential building. Figure 4 shows what method of evacuation occupants would choose during a fire evacuation:

- i) 66.7% would definitely take the stairs and 16.67% would probably take the stairs;
- ii) 7.69% would probably take the lift and 0% would definitely take the lift.

Similar results were produced in a survey undertaken by Galea (2014) of 424 people, of which two thirds said that they would not consider using a lift to evacuate despite being informed that the lifts were a safe and acceptable option. These results show that most

1  
2  
3 occupants are still reluctant to use a lift as a method of egress during an emergency  
4 evacuation, and that the stairs would be more than likely used by most occupants. Occupants  
5 need to be educated more on the using a lift for evacuation, as in most cases signage alone is  
6 not enough.  
7  
8

9  
10 Insert Figure 4 here.

11  
12 Figure 5 shows that the higher the floor of residence the more its occupants are likely to use  
13 the lift:  
14

- 15  
16 i) 0% of occupants on floors 1-9 and 10-19 answered that they would 'Definitely' or  
17 'Probably' take the lift;  
18  
19 ii) 30% of occupants on floors 20-29 answered that they would 'Probably' use the  
20 lift;  
21  
22 iii) 42.86% of occupants on floors 30-39 would 'Probably' use the lift.  
23

24  
25 The data shows that occupants residing in higher floors are more likely to use a lift in an  
26 evacuation situation. These results compare well to data collected by Heyes (2009) of 229  
27 respondents, the analysis of which showed a similar linear relationship between floor level  
28 and the percentage of respondents that would use the lift as a method of evacuation.  
29  
30

31  
32 Insert Figure 5 here.  
33

34 The results shown in Figure 6 show the comparison of selected method of egress and the age  
35 of occupants. This illustrates that the older the occupants, the less likely they are to use the  
36 stairs to evacuate during a fire situation. This decision would most likely be down to the  
37 physical capabilities of older occupants, which would lead to evacuation being difficult and  
38 time consuming. While there is no specific evidence within the responses, there may also be  
39 some awareness of the tiring nature of walking down multiple flights of stairs. The concerns  
40 of evacuation of elderly or impaired occupants was mentioned by one participant of the  
41 survey, the participant went on to explain their previous experience of evacuating occupants  
42 requiring assistance, in which it was found such an evacuation can take a long time.  
43 Furthermore, the results show that 0% of occupants in the 18-24 and 25-34 age brackets  
44 would take a lift during a fire evacuation. This suggests that younger occupants take the stairs  
45 regardless of what floor they reside on.  
46  
47  
48  
49  
50  
51  
52

53  
54 Insert Figure 6 here.  
55  
56  
57  
58  
59  
60

1  
2  
3 Q5. Sought to establish what the participants initial reaction would be to a fire alarm in the  
4 middle of the night. Figure 7 shows the results of this question.  
5  
6

7  
8 These results show that only 21.79% of respondents would evacuate immediately, a result  
9 that correlates to a study in Egypt of 62 multi-storey residents who were asked ‘what you do  
10 when you hear the fire alarm’. The results showed that evacuating the building immediately  
11 had a relative important index of 62.39% (Gerges *et al*, 2017). The results here show that  
12 there are issues in trying to get occupants to immediately evacuate multi-storey residential  
13 buildings. Moreover, Gerges *et al* (2017) showed that the number one ranked factor of  
14 occupants was to ‘Ask neighbours regarding if there is a fire (i.e. Investigate)’, this factor had  
15 a relative important index of 84.33%. This coincides with the 41.03% of participants in this  
16 research that answered that their initial reaction would be to wait until they were sure of a  
17 real fire. Research of 225 participants by Cordeiro *et al* (2011) showed that 65% of occupants  
18 first reaction to a fire alarm was ‘find out what was happening’. These results show that  
19 occupants need to be confident of a real threat before they will immediately evacuate the  
20 building.  
21  
22  
23  
24  
25  
26  
27  
28

29 Insert Figure 7 here.  
30

31  
32 Q12 Asked the occupants ‘If there was an alternate alarm in place that went off when there  
33 was a fire within (close) proximity, would this increase the speed of your evacuation?’ The  
34 results are displayed in Figure 8.  
35

36  
37 Insert Figure 8 here.  
38

39  
40 Figure 8 shows that 73.08% of occupants would definitely or probably evacuate quicker.  
41 When the response of those occupants presented in Figure 7 that did not answer ‘evacuate  
42 immediately’, it can be shown (Figure 9) that an alternate alarm would either definitely or  
43 probably increase 75.44% of occupants’ evacuation speed. However, 11.48% probably would  
44 not evacuate quicker and 13.12% answered that it would not make a difference to their  
45 evacuation speed, thereby evidencing that some people will always be reluctant to leave their  
46 residential properties immediately. Nonetheless, the results show that most occupants would  
47 actually evacuate quicker with an alternate alarm, if that alarm would make the occupants  
48 aware that the fire was a serious threat and not a fire drill. This in turn would improve the  
49 evacuation speed for the majority of occupants. This point was highlighted by responder who  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60



1  
2  
3 stated that different alarms in relation to differing proximities of a fire would help the  
4 evacuation process.  
5

6  
7 Insert Figure 9 here.  
8

9  
10 Q6 Establishes if a resident would use a lift as a method of egress during a fire evacuation  
11 situation. Only 1.28% of occupants would 'strongly agree' that they would use a lift.  
12 Moreover, 46.15% of participants answered that they 'strongly disagree'. Overall, the results  
13 show a clear indication of occupants' reluctance to use a lift during a fire evacuation.  
14  
15

16  
17 Q9. Asked the occupants if they would use stairs as a method of egress during a fire  
18 evacuation. In this aspect, the results were as were expected, based on the literature; 66.67%  
19 'Strongly agree' and 23.08% 'Agree' that they would use the stairs during a fire evacuation.  
20 Only 5.13% of occupants answered 'Disagree', which is most likely down to a disability or  
21 being physically incapable of using the stairs.  
22  
23

24  
25 Q10. To ensure an efficient evacuation of a multi-storey building it is vital to give occupants  
26 a sufficient amount of information regarding the fire evacuation procedures within their  
27 building. This section of the research investigated whether occupants considered themselves  
28 to be well informed on the fire evacuation procedures in their buildings. The results are  
29 displayed in Figure 10.  
30  
31

32  
33 Insert Figure 10 here.  
34

35  
36 Figure 10 shows that 46.16% of occupants 'Strongly agree' or 'Agree' that they are well  
37 informed regarding fire evacuation procedures in their building. Moreover, 23.08%  
38 'Disagree' and 11.54% 'Strongly disagree' that they are well informed on their fire  
39 evacuation procedures; a worrying statistic, as a lack of information can have a major impact  
40 on the success of an evacuation should a real fire occur. Three participants of the  
41 questionnaire commented that no evacuation details were provided regarding their multi-  
42 storey residential building. However, these results present a more positive picture than does  
43 the research completed by Lo, Lam and Yuen (2000) of two cases in Hong Kong, which  
44 showed that a total 68.9% of occupants had not received any training on evacuation  
45 procedures. Additionally, Cordeiro *et al* (2011) asked 225 occupants in Portugal about their  
46 knowledge of evacuation plans, and only 35% answered that they were aware of their  
47 building's evacuation plan. These results show that occupants need to be more  
48 educated/informed regarding their building's relevant fire safety and evacuation procedures.  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

If clear information is given to occupants then they will be aware of the most efficient method of evacuation, thereby mitigating some of the various factors can affect how an occupant evacuates.

Within question 11 the occupants were asked which factors would most likely affect their decision making when choosing a method of egress during a fire evacuation. Figure 11 shows the occupants' responses:

- The main factors that occupants base their choice of egress method on is 'The emergency evacuation signs' (37.18%) and 'the familiarity of the route' (35.90%).
- The least common choice is 'The route that requires the least amount of physical work'; only 1.28% of occupants chose this factor which could be due to issues displayed in previous results that some occupants may have a disability or physical incapability.
- Only 7.69% of occupants answered that 'the least congested route of egress' was a factor that can affect their choice of egress method.

These results could indicate that other occupants will continue to evacuate using an egress method that is highly congested despite other options being available. Research by Lawson (2011) asked participants to rate how influential different factors were on their choice of egress, with the factors being rated from 1 (not at all influential) to 5 (very influential). The results showed that occupants rated 'other occupants' as the most influential factor with an average rating of 5, followed by 'distance' and 'instruction from authority figure' with an average rating of 4. The 'familiarity with route' only measured a 3.5 on the influence scale, although Figure 10 shows that this same factor was chosen as the main factor affecting the occupant's choice of egress. One participant of the questionnaire commented that the use of technology in fire evacuation should be implemented to aid occupants; the researchers here believes that this would be a viable option due to the high number of smart phones being used within the UK.

Insert Figure 11 here.

The last section of the questionnaire asks the occupants to rate their concerns for different hazards relating to lifts and stairs during a fire evacuation situation, the results for the lift hazards can be shown in Table 1.

Hazard	Relative	Rank
--------	----------	------

	<b>Importance Index</b>	
Being stuck in the lift	89.60%	1
Smoke entering the lift	88.95%	2
Fire entering the lift	84.53%	3
Power failure leading to the lift falling	80.53%	4
Having to wait to long for the lift to arrive	76.05%	5
Other people needing to use the lift more than me	71.84%	6
Not being provided with enough information on using the lift during a fire evacuation	70.53%	7

Table 1 Respondents answers to 'if using a lift to evacuate a multi-storey building during a fire evacuation, how concerned would you be about the following hazards?'

Analysis of Table 1 shows that the main concern when using a lift during a fire evacuation was 'being stuck in the lift' (89.60%) followed by 'smoke entering the lift' (88.95%). This shows that more information could be given to the occupants regarding the engineering of the lift and its actual level of resistance to fire and smoke. For comparison, Table 2 displays the results of the occupants' concerns regarding hazards when using the stairs during a fire evacuation. These results show that 'fire entering the stairway' (86.87%) and 'smoke entering the stairway' (82.56%) are the greatest concerns of occupants when evacuating using the stairs. This data shows that occupants are worried that a stairway could be filled with fire or smoke. A sufficient way to address this hazard would be to install 'smart' signs that tell the occupants which egress stairway to take to avoid the fire.

<b>Hazard</b>	<b>Relative Importance Index</b>	<b>Rank</b>
Fire entering the stairway	86.67%	1
Smoke entering the stairway	82.56%	2
Stairs taking too long to evacuate	73.25%	3
Congestion in the stairway	69.74%	4
Slipping or falling down the stairs	66.12%	5
Not being physically capable of walking down stairs	56.86%	6
Not being familiar with the route	54.12%	7

Table 2 Respondents answers to 'if using stairs to evacuate a multi-storey building during a fire evacuation, how concerned would you be about the following hazards?'

Moreover 'not being physically capable of walking down stairs' (56.86%) ranked number 6 on the table. Heyes (2009) research (focused on San Francisco) showed that 55% of occupants answered 'not at all concerned' about not being physically fit enough to travel down many flights of stairs. The researchers suspect that some occupants who state they are not concerned about being physically fit enough to walk down a high number of stairs, may assume they are in better physical condition that they actually are.

### Interview results

Three interviews were completed with experts within the field of fire engineering, one from the UK, one from New Zealand, and one from Sweden. Each participant was invited to take part in a 20 – 30 minute interview which consisted of five questions. One interview was conducted face-to-face, and the other two were conducted via an online call.

The first question asked the interviewee's opinion on the main challenges that occupants face during a fire evacuation of a multi-storey residential building. Interviewee 1 suggested that the main challenge is occupants not having enough information during the evacuation process. Interviewee 2 agreed that providing information on evacuating the building is one of the main challenges when evacuating a multi-storey residential building. Furthermore, interviewee 3 explained that the long distances occupants need to travel to evacuate high-rise buildings in particular is the main challenge, especially if there are occupants with mobility impairments or disabilities. Interviewees 1 and 3 both mentioned 'culture', as this can affect occupants' decisions when evacuating a multi-storey residential building, with Interviewee 1 suggesting that people in the Middle East are not as serious about fire alarms as people within the UK.

The second question of the interview investigated whether occupants are provided with enough information on the fire evacuation procedures within multi-storey residential buildings. Interviewee 2 and 3 both explained that this depends on the country of the building but the consensus was that information and awareness could be improved within the UK. Interviewee 1 suggested that there is a lack of use of technology during fire evacuations, and that smart phones, for example, could be utilised to improve evacuation efficiency. Furthermore, Interviewee 1 stated that information given by other occupants during a fire evacuation can be inaccurate and during a previous fire evacuation of a multi-storey building a voice communication message stated, "Please evacuate the building immediately" but there was no information given regarding the shortest and safest route to take.

Question three aimed to find out if occupants are reluctant to leave their properties unless they are confident of a real threat. All three interviewees agreed that occupants were reluctant to leave their properties with both Interviewee 1 and 2 using the words 'definitely'. Interviewee 2 and 3 both argued that the evacuation time from a residential building is higher than that for an office building. All three interviewees suggested that occupants are reluctant to leave their belongings, or will collect them before they evacuate a multi-storey residential

1  
2  
3 building. Interviewee 1 also suggested that occupants tend to look at others as leaders before  
4 they evacuate, and their decisions on when to evacuate will be based on their knowledge of  
5 fire situations and any previous fire/evacuation experience.  
6  
7

8 Question four asked what the main factors are that affect occupants' decisions during an  
9 evacuation. Interviewees 2 and 3 both identified 'social' interaction or influence as being a  
10 key factor; the information occupants receive from other occupants can impact their  
11 decisions. Moreover, Interviewee 1 suggested that the structural layout of the building is a  
12 main factor, as it plays an important role on what evacuation route the occupants may take.  
13 This point is supported by Interviewee 2 who stated that the environmental condition of the  
14 building is critical to finding a way out. Smoke was mentioned by both Interviewees 1 and 2  
15 as important factors than can affect the decision of the occupants; the sight or smell of smoke  
16 can change the occupants egress route. Interviewee 2 suggested that the physical performance  
17 of the occupant also needs to be considered, especially in terms of mobility, because if the  
18 occupant is required to use many stairs to evacuate then their body's physical performance  
19 becomes a factor.  
20  
21  
22  
23  
24  
25  
26  
27

28 The interviewees were asked in question five to explain if they thought occupants were still  
29 reluctant to use lifts during a fire evacuation, even if they are deemed safe to use. All three  
30 interviewees agreed that many occupants still have the stereotypical view that lifts should not  
31 be used, no matter what. Interviewee 2 suggested that this can also depend on the time an  
32 occupant is willing to wait for a lift; previous research has shown that, in general, occupants  
33 are not willing to wait more than 10 minutes for a lift. Interviewee 1 agreed that waiting too  
34 long for the lift to arrive can deter occupants from using a lift. Interviewee 1 also suggested  
35 that their personal experience has led to the conclusion that some occupants would not use  
36 the lift even if it was safe, due to factors such as:  
37  
38  
39  
40  
41  
42

- 43 • Not being enough room in the lift for the whole family,
  - 44 • Too many other occupants waiting for the lift,
  - 45 • Some lifts being out of order, which gave the impression that the lifts were unreliable.
- 46  
47  
48

49 Interviewees 2 and 3 stated that occupants need to be more educated about both fire situation  
50 and evacuation procedures, and given more information on the use of lifts during an  
51 evacuation of a multi-storey residential building.  
52  
53  
54  
55  
56  
57  
58  
59  
60

## Conclusions

The aim of the research was to explore human behaviour during a fire evacuation and place such behavioural responses in the context of a multi-storey residential building in the UK so as to suggest factors relevant to the safe evacuation of residents. The research evidenced that there are various factors that discourage occupants from using certain egress routes. For example, the results of the questionnaire evidenced that fire and smoke entering the stairway are the main factors that affect use of the stairs during an evacuation. In addition, the questionnaire results evidenced that the factors deterring occupants from using a lift are concerns of being stuck in the lift and smoke or fire entering the lift. The interviews also concluded that lifts are still perceived as being dangerous to use during a fire evacuation situation, which is no longer completely accurate as some lifts in multi-storey buildings are designed to allow safe evacuation during a fire. However, occupants need to be thoroughly educated and clearly informed with regard to such factors.

Various issues can affect the occupants' behaviour during a multi-storey fire evacuation. The questionnaire results showed that the majority of occupants would not immediately evacuate their residence when hearing a fire alarm. Moreover, the results of the interviews stated that this is because occupants are reluctant to leave their personal possessions or property as in many cases the fire alarm is a false alarm or a drill. The results of the questionnaire also showed that the occupant's reluctance to evacuate immediately once hearing a fire alarm could be reduced through the use of an alternate alarm that indicated a fire was within close proximity. The researchers conclude that this would help occupants to make more effective decisions in a fire situation and thus speed up the evacuation time of those occupants in closest proximity to the fire.

There are several factors to consider that can affect occupants' receipt of 'threat' cues during a fire evacuation. The literature review identified that occupants of residential multi-storey buildings may not receive cues such as smell, sight and noise, as they generally live in fire-tight properties. The questionnaire results show that most occupants will wait until they are sure a fire is 'real' before they evacuate, thereby suggesting that cues such as other people evacuating are not considered until a real fire has been confirmed. The interviews produced results that identified culture as an important factor affecting the interpretation of the cues occupants receive; some cultures are not serious about fire alarms and will not consider an alarm as evidence of a 'real' fire situation. Occupants fire responses should be considered to

1  
2  
3 be an important factor to be cogniscent of when drawing up evacuation strategies / plans for  
4 multi-storey buildings.  
5  
6  
7

### 8 **Recommendations for future research**

9 The researchers acknowledge a constraint when carrying out this research was their limited  
10 access to fire engineering experts within the UK. Additional interviews with experts within  
11 the UK would undoubtedly add further insight into human behaviour of occupants  
12 specifically in the UK.  
13  
14  
15

16 The research suggests that a further questionnaire could be distributed to occupants that  
17 reside in properties having a lift that can be used during a fire evacuation. This will produce  
18 detailed results on whether occupants would not use a lift even after being informed that the  
19 lift is safe to use. Due to the limited information provided to occupants during the evacuation,  
20 the researchers recommend further research is required into this area.  
21  
22  
23  
24

25 The results of the research have shown that occupants need to be more informed on the fire  
26 safety procedures within their building, the research would suggest a possible mobile phone  
27 application that could be used by occupants of a building. The app would update occupants  
28 on any changes to the building, such as lifts being out of use, and could be used during a fire  
29 evacuation to inform occupants of the safest route to take, ensuring the shortest evacuation  
30 time. The researchers also recommend an alternate alarm within a multi-storey building that  
31 alerts occupants when there is a fire within close proximity. This would speed up the  
32 evacuation decision for those occupants who would usually wait until they were sure of a real  
33 fire before evacuating. The researchers believe that the implementation of these  
34 recommendations would improve both the level of safety and the speed of a fire evacuation in  
35 the context of a multi-storey residential building.  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

## References

- Adler, D (2007). *Metric Handbook. Planning and Design Data*. Routledge.
- Ahrens, M. (2016). *High-rise Building Fires*. National Fire Protection Association. November 2016. NFPA, Quincy, Michigan.
- Barber, D. (2010). Fire: the psychology of occupant response. *FM Magazine*, February 25 2010. Niche Media, Australia.
- Bengtsson, J. Karlsson, B. Thorstiensson, D. and Tomasson, B. (2008). A Probabilistic Risk Analysis Methodology for High-rise Buildings taking into Account Fire Department Intervention Time. *Fire Safety Science - Proceedings of the ninth international symposium*, pp.957-968.
- Bulman, M. (2017) Grenfell Tower fire: Undocumented migrants could still be missing. *Independent*. 19 June 2017. Available at: <http://www.independent.co.uk/news/uk/home-news/grenfell-tower-fire-disaster-latest-residents-families-victims-homeless-immigration-status-migrants-a7798051.html>
- Canter, D. (1996). An Overview of Behaviour in Fires. *Psychology in Action*, pp.159-188.
- Charters, D. Fraser-Mitchell, J. (2009). *Guidance on the emergency use of lifts or escalators for evacuation and fire and rescue service operations BD 2466*. Department for Communities and Local Government, HMSO London. ISBN: 978 1 4098 1159 6. Accessed November 28, 2017. Available at: <http://www.highrisefirefighting.co.uk/docs/guidanceemergencylifts.pdf>
- Chen, T. Huang, L. and Hongyong, Y. (2014). Simulation study of evacuation in high-rise buildings. *The Conference on Pedestrian and Evacuation Dynamics*, 2, pp.518-523.
- Cordeiro, E. Coelho, A., Rossetti, R. and Almeida, J. (2011). Human Behavior under Fire Situations – A case–study in the Portuguese Society. *Evacuation and Human Behavior in Emergency Situations*, pp.63-80.
- Cowlard, A. Bittern, A. Abecassis-Empis, C. and Torero, J. (2013). Fire safety design for tall buildings. *Procedia Engineering*, pp.169-181.



1  
2  
3 Designing Buildings (2017). High-rise building. Designing Buildings Wiki. As at  
4 September 30, 2017. Accessed on November 30, 2017. Available at:

5  
6 [https://www.designingbuildings.co.uk/wiki/High-rise\\_building](https://www.designingbuildings.co.uk/wiki/High-rise_building)  
7

8 Edgar, E. and Chow, W. (2011). Fire Safety Concerns on Existing Supertall Buildings  
9 and Proposed Upgrading in Hong Kong. *International Journal on Engineering*  
10 *Performance-Based Fire Codes*, 10(2), pp.24-35.  
11

12  
13  
14 Fellows, R. and Liu, A. (2015), *Research Methods for Construction*, Wiley Blackwell,  
15 Oxford, pp. 1-258.  
16

17  
18 Firesafe.org.uk. (2011). *Regulatory Reform (Fire Safety) Order 2005: Firesafe.org.uk.*  
19 [online] Available at: [http://www.firesafe.org.uk/regulatory-reform-fire-safety-order-](http://www.firesafe.org.uk/regulatory-reform-fire-safety-order-2005/)  
20 [2005/](http://www.firesafe.org.uk/regulatory-reform-fire-safety-order-2005/) [Accessed 24 Oct. 2016].  
21  
22

23 Fridolf, K. Nilsson, D. (2012). A questionnaire study about fire safety in underground rail  
24 transportation systems. Department of Fire Safety Engineering and Systems Safety Lund  
25 University, Sweden. Accessed November 28, 2017. Available at:

26  
27 <http://www.metroproject.se/Pubs/LU3164.pdf>  
28

29  
30 Galea, E. (2012). Panic, what Panic? Fire, Evacuation and Crowd Safety Blog. October  
31 20, 2012. Accessed November 28, 2017. Available at: <http://fseg.gre.ac.uk/blog/?p=252>  
32  
33

34 Galea, E. (2014). High-rise Building Evacuation Post 911 – Addressing the issues. *Tall*  
35 *Building Fire Safety Conference*, pp.75-89.  
36  
37

38 Gerges, M. Mayouf, M. Rumley, P. and Moore, D. (2017). Human-behaviour under fire  
39 situations in high-rise residential building. *International Journal of Building Pathology*  
40 *and Adaptation*, 35(1).  
41  
42

43 Haitao, C. Leilei, L. and Jiuzi, Q. (2012). International Symposium on Safety Science and  
44 Engineering in China: Accident Cause Analysis and Evacuation Countermeasures on the  
45 High-rise Building Fires. *Procedia Engineering*, 43, pp.23-27.  
46  
47  
48

49 Hall, I. (2010). *Efficient Evacuation of Tall Buildings in Fire Using Lifts*. Masters of  
50 Philosophy. University of Manchester.  
51

52  
53 Hamins, A. McGrattan, K. (2007). Verification and Validation of Selected Fire Models  
54 for Nuclear Power Plant Applications, Volume 2 (NUREG-1824). National Institute of  
55  
56  
57

Standards and Technology, Gaithersburg, MD (US). Available at:  
<http://fire.nist.gov/bfrlpubs/fire07/art029.html>

Hearn, G.L. (2015). London Tall Buildings Survey 2015. New London Architecture/G.L. Hearn Limited, London. March 2015. Accessed on November 30, 2017. Available at:  
[http://www.newlondonarchitecture.org/docs/tall\\_bldgs\\_survey\\_2015.pdf](http://www.newlondonarchitecture.org/docs/tall_bldgs_survey_2015.pdf)

Heffelmire, J. Jalayerian, M. and Quiter, J. (2016). *The challenge: Tall and super-tall buildings* | *Consulting-Specifying Engineer*. [online] Csemag.com. Available at:  
<http://www.csemag.com/single-article/the-challenge-tall-and-super-tall-buildings/f08bab0281056095e2422f861a8bd7c0.html> [Accessed 19 Oct. 2016].

Heyes, E. (2009) *Human Behaviour Considerations in the Use of Lifts for Evacuation for High Rise Commercial Buildings*. Master thesis. University of Canterbury.

Hickey, W. (2014). The Tall Apple: Number of Stories in NYC Skyscrapers Might Floor You. FiveThirtyEight, March 7, 2014. Accessed on November 30, 2017. Available at:  
<https://fivethirtyeight.com/features/the-tall-apple-number-of-stories-in-nyc-skyscrapers-might-floor-you/>

HM Government, (2010) The Building Regulations. Approved Document B: Fire Safety. London: NBS.

Johnson, C. (2005). *Lessons from the Evacuation of the World Trade Centre, September 11th 2001 for the Development of Computer-Based Simulations*. Glasgow Accident Analysis Group. Glasgow: University of Glasgow.

Kinateder, M.T. Kuligowski, E.D. Reneker, P.A. Peacock, R.D. (2015). Risk perception in fire evacuation behavior revisited: definitions, related concepts, and empirical evidence. *Fire Science Reviews*. January 8, 2015. Springer. Accessed November 28, 2017. Available at: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5012356/>

Klote, J. Alvord, D. Levin, B. and Groner, N. (1992). *Feasibility and Design Considerations of Emergency Evacuation by Elevators*. NISTIR 4870. Washington D.C.: U.S. Department of Commerce.

Kuligowski, E. (2009). *The Process of Human Behaviour in Fires*. NIST Technical Note 1632. U.S. Department of Commerce.

Kumar, R. (2014). *Research Methodology*. (4th Ed.). Sage Publications Ltd.

1  
2  
3 Lawson, G. (2011). *Predicting human behaviour in emergencies*. PhD. University of  
4 Nottingham.

5  
6  
7 LeGood, J. (2017). Grenfell Tower – Staying Put. AfterWork. June 20 2017. Accessed:  
8 November 23 2017. Available at:

9  
10 <https://afterwork101.wordpress.com/2017/06/20/grenfell-tower-staying-put/>

11  
12 Lo, S.M, Lam, K.C and Yuen, K.K. (2000). A pre-evacuation behavioural study for the  
13 people in high-rise residential buildings under fire situations. *International Journal on*  
14 *Engineering Performance-Based Fire Codes*, 2(4), pp.143-152.

15  
16  
17 Naoum, S.G. (2007), *Dissertation Research and Writing for Construction Students*, 2nd  
18 ed., Butterworth-Heinemann, Oxford.

19  
20  
21 Nilsson D, Kinater M. (2015) *Virtual Reality Experiments - The Future or a Dead*  
22 *End?*. Human Behaviour in Fire Symposium.

23  
24  
25 Noordermeer, R. (2010). *Usage of Lifts for the Evacuation of High-rise Projects*.  
26 Bachelors of Science. Delft University of Technology.

27  
28  
29 Paunović, K. (2008). Data, Information, Knowledge. *Encyclopedia of Public Health*, pp  
30 203-207. Ed, Kirch, W. Springer Netherlands. ISBN 978-1-4020-5614-7. Accessed,  
31 November 30, 2017. Available at:

32  
33  
34 [https://link.springer.com/referenceworkentry/10.1007%2F978-1-4020-5614-7\\_685](https://link.springer.com/referenceworkentry/10.1007%2F978-1-4020-5614-7_685)

35  
36  
37 Proulx, G. (2001). *Occupant Behaviour and Evacuation*. Institute for Research in  
38 Construction. National Research Council Canada.

39  
40  
41 Proulx, G. (2003). Playing with fire: understanding human behavior in burning buildings.  
42 *Institute for Research in Construction. National Research Council Canada*, 45(7), pp.33-  
43 35.

44  
45  
46 Proulx, G. (2004). *Evacuation by elevators: who goes first?* Institute for Research in  
47 Construction. National Research Council Canada, pp.1-13.

48  
49  
50 Proulx, G. Heyes, E. Hedman, G. Averill, J. Pauls, J. McColl, D. and Johnson, P. (2009).  
51 The Use of Elevators for Egress. *International Symposium on Human Behaviour in Fire*,  
52 4, pp.97-110.  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 Rae, A. Alexander, R. (No Date). Forecasts or fortune-telling: when are expert  
4 judgements of safety risk valid? Accessed November 30, 2017. Available at: [http://www-](http://www-users.cs.york.ac.uk/~rda/Experts%20and%20Alchemy%20V10.pdf)  
5 [users.cs.york.ac.uk/~rda/Experts%20and%20Alchemy%20V10.pdf](http://www-users.cs.york.ac.uk/~rda/Experts%20and%20Alchemy%20V10.pdf)  
6  
7

8 Reicher, S.D. (1987). Crowd behaviour as social action. In J.C.Turner, M.A. Hogg, P.J.  
9 Oakes, S.D. Reicher & M.S. Wetherell, Rediscovering the Social Group: A Self-  
10 Categorization Theory (pp. 171-202), Oxford: Blackwell.  
11  
12

13 Ronchi, E. Kuligowski, E.D. Reneke, P.A. Peacock, R.D, Nilsson, D. (2013). The  
14 Process of Verification and Validation of Building Fire Evacuation Models. NIST  
15 Technical Note 1822. National Institute of Standards and Technology. US Department of  
16 Commerce.  
17  
18  
19

20 Ronchi, E. and Nilsson, D. (2013). Fire evacuation in high-rise buildings: a review of  
21 human behaviour and modelling research. *Fire Science Reviews*, 2(7), pp.1-21.  
22  
23

24 Saunders, M. N. K. Lewis. P. and Thornhill. A. (2015). Case study research: Design and  
25 methods (4th Ed.). Thousand Oaks, CA: Sage.  
26  
27

28 Sekizawa, A. Ebihara, M. Notake, H. Kubota, K. Nakano, M. Ohmiya, Y. and Kaneko, H.  
29 (1999), Occupants' behaviour in response to the high-rise apartments fire in Hiroshima  
30 City. *Fire Mater.*, 23: 297–303. doi:10.1002/(SICI)1099-018(199911/12)23:6<297::AID-  
31 FAM702>3.0.CO;2-2.  
32  
33  
34

35 Shields, T.J. Boyce, K.E, McConnell, N. (20. 09). The behaviour and evacuation  
36 experiences of WTC 9/11 evacuees with self-designated mobility impairments. *Fire*  
37 *Safety Journal*, Volume 44, Issue 6, August 2009, Pages 881-893. Elsevier Ltd.  
38  
39  
40

41 Siikonen, M. and Hakonen,H. (2002). *EFFICIENT EVACUATION METHODS IN TALL*  
42 *BUILDINGS*. Elevator Technology 12. IAEE.  
43  
44

45 Skyscraperpage (2017). Cities and Buildings database. Skyscraper resource Media.  
46 Accessed on November 30, 2017. Available at: <http://skyscraperpage.com/cities/?10=3>  
47  
48

49 Tajfel, H. Turner, J.C. (1979). An integrative theory of group conflict. In W.G. Austin &  
50 S. Worchel (Eds.), *The Social Psychology of Intergroup Relations* (pp. 33-47). Monterey,  
51 CA.:Brooks.  
52  
53

54 Weber, B.J. Chapman, G.B. (2005). The combined effects of risk and time on choice:  
55 Does uncertainty eliminate the immediacy effect? Does delay eliminate the certainty  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

effect? Organizational Behavior and Human Decision Processes. Volume 96, Issue 2, March 2005, Pages 104-118. Elsevier. Accessed November 30. 2017. Available at: <http://www.sciencedirect.com/science/article/pii/S0749597805000026>

Winerman, L. (2004). Fighting fire with psychology. Monitor On Psychology. September, 2004. Vol. 35, No. 8. American Psychological Association. Accessed November 23 2017. Available at: <http://www.apa.org/monitor/sep04/fighting.aspx>

Yin, R. K. (2009). Case study research: Design and methods (4th Ed.). Thousand Oaks, CA: Sage.

**Figures**

$$= \frac{5(n5)+4(n4)+3(n3)+2(n2)+n1}{5(n1+n2+n3+n4+n5)} \times 100$$

Figure 1 Relative Importance Index (%)

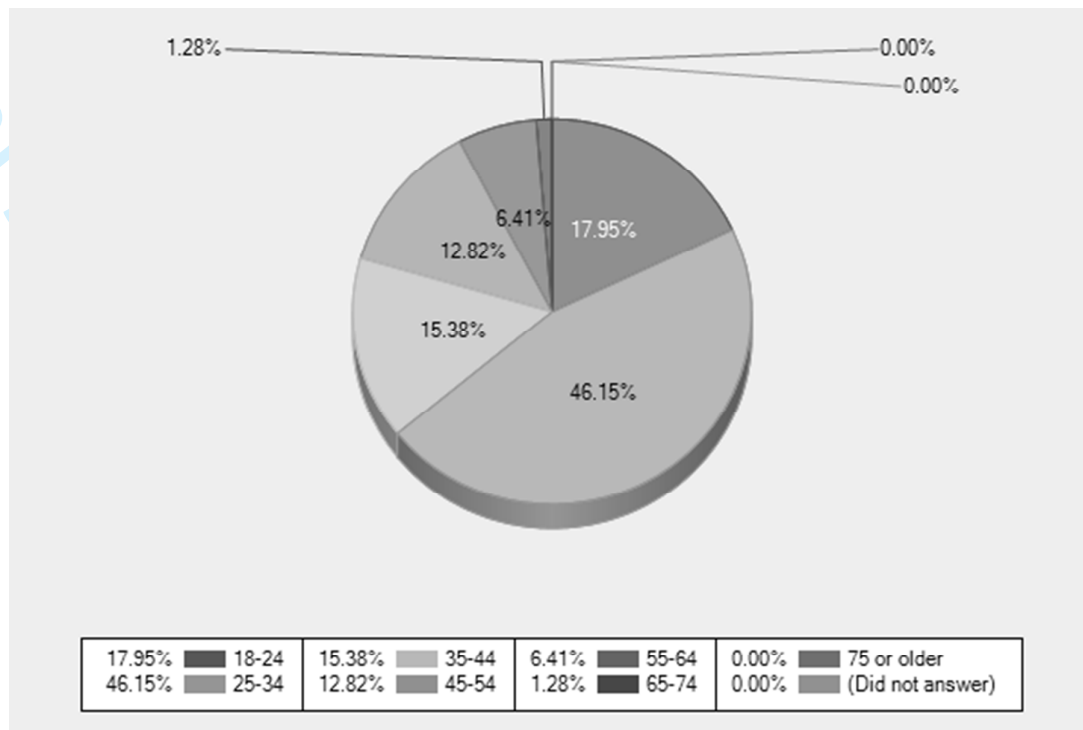


Figure 2 Age of participants

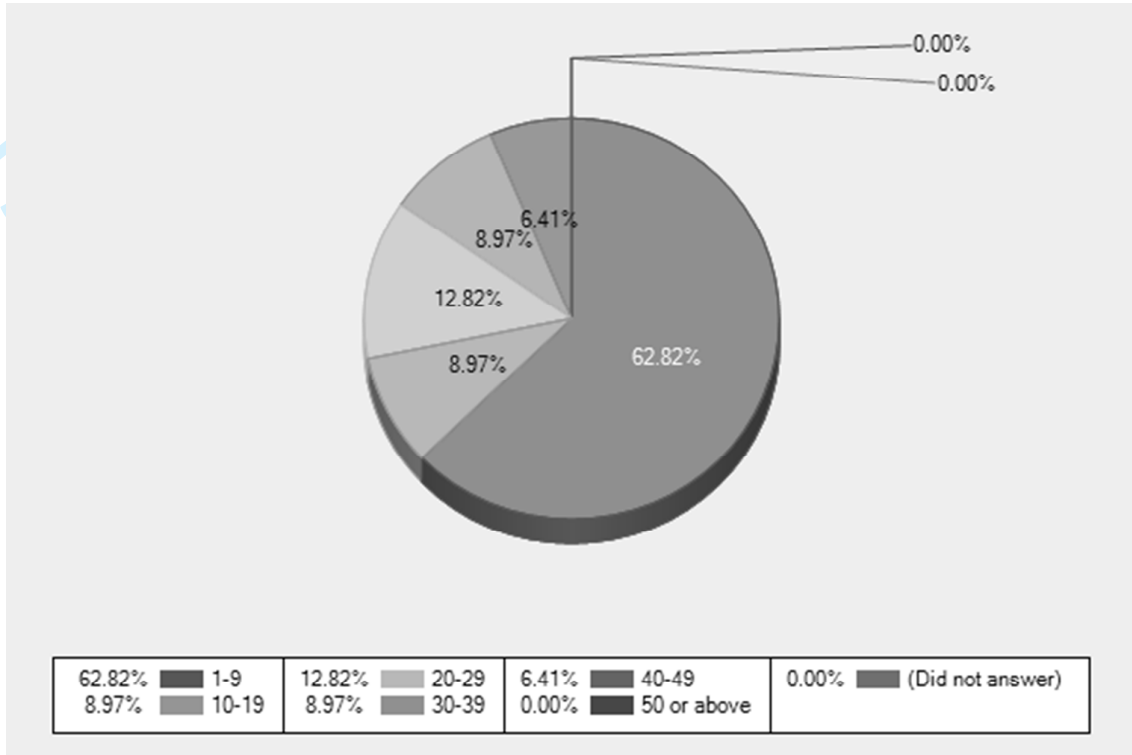


Figure 3 Floor of building that occupants reside

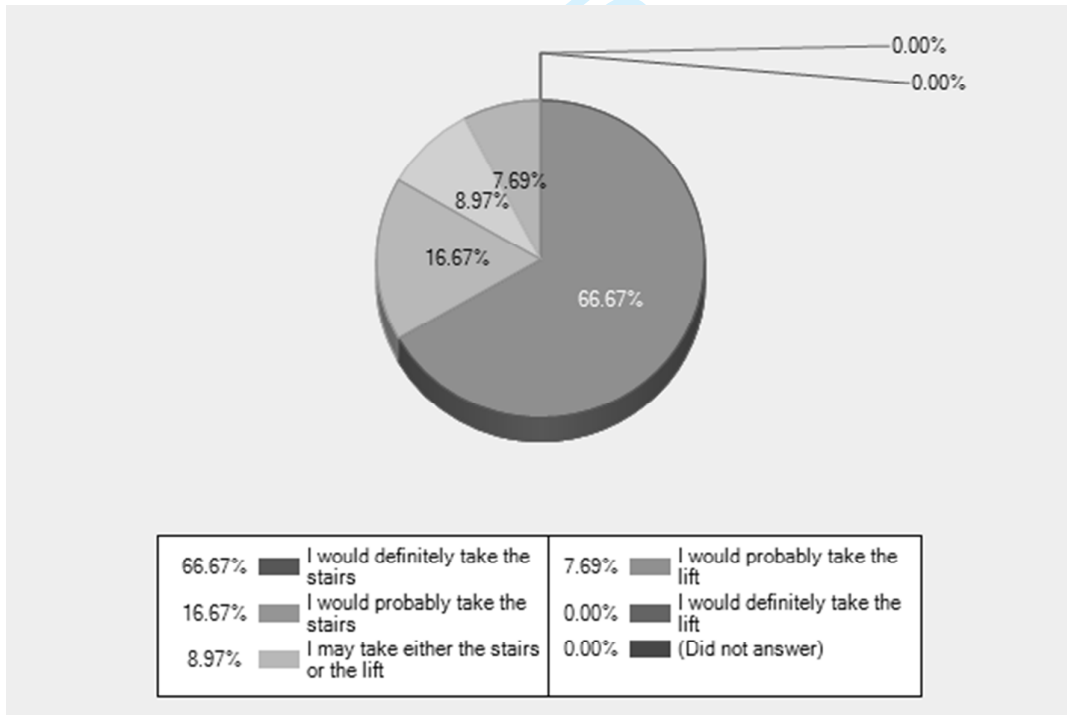


Figure 4 Methods of evacuation

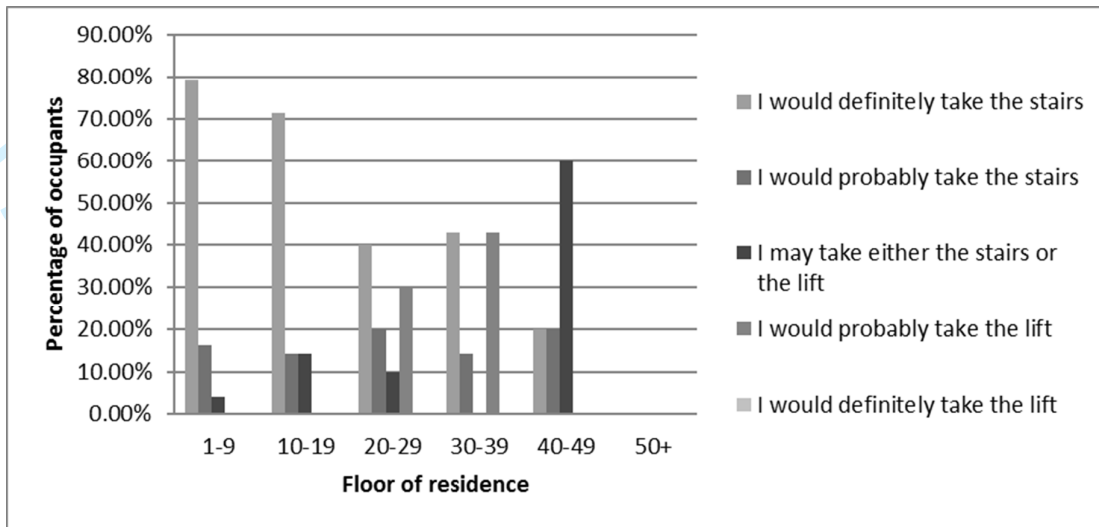


Figure 5 Comparison of egress method and floor of residence

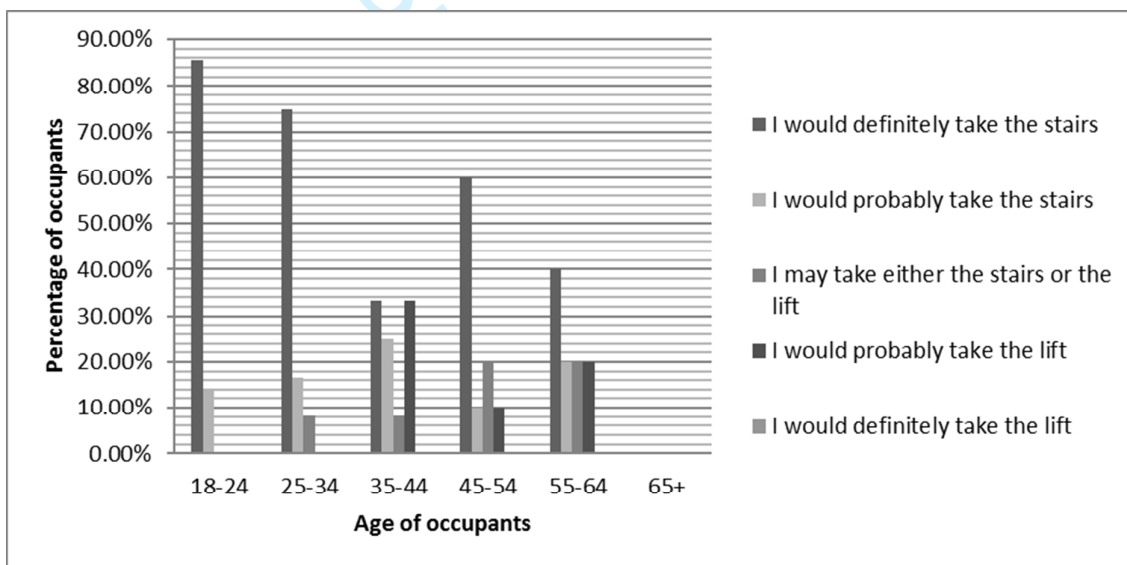


Figure 6 Choice of egress and age of occupant comparison



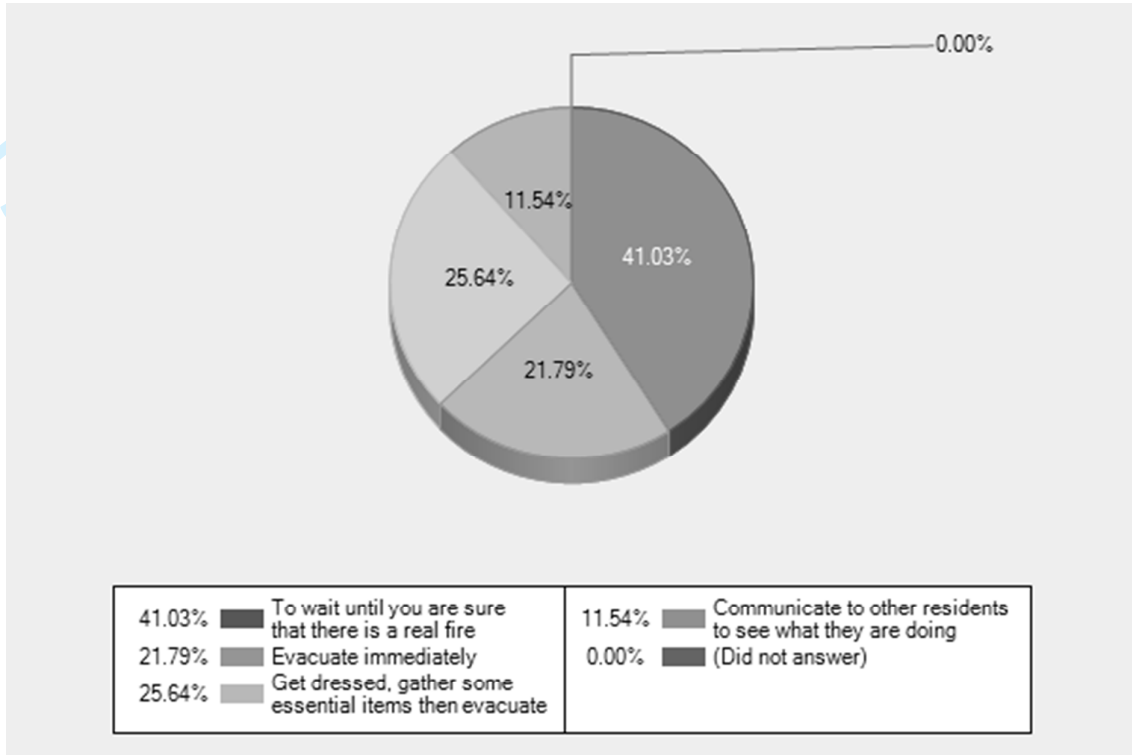


Figure 7 Initial reactions to a fire alarm in the middle of the night

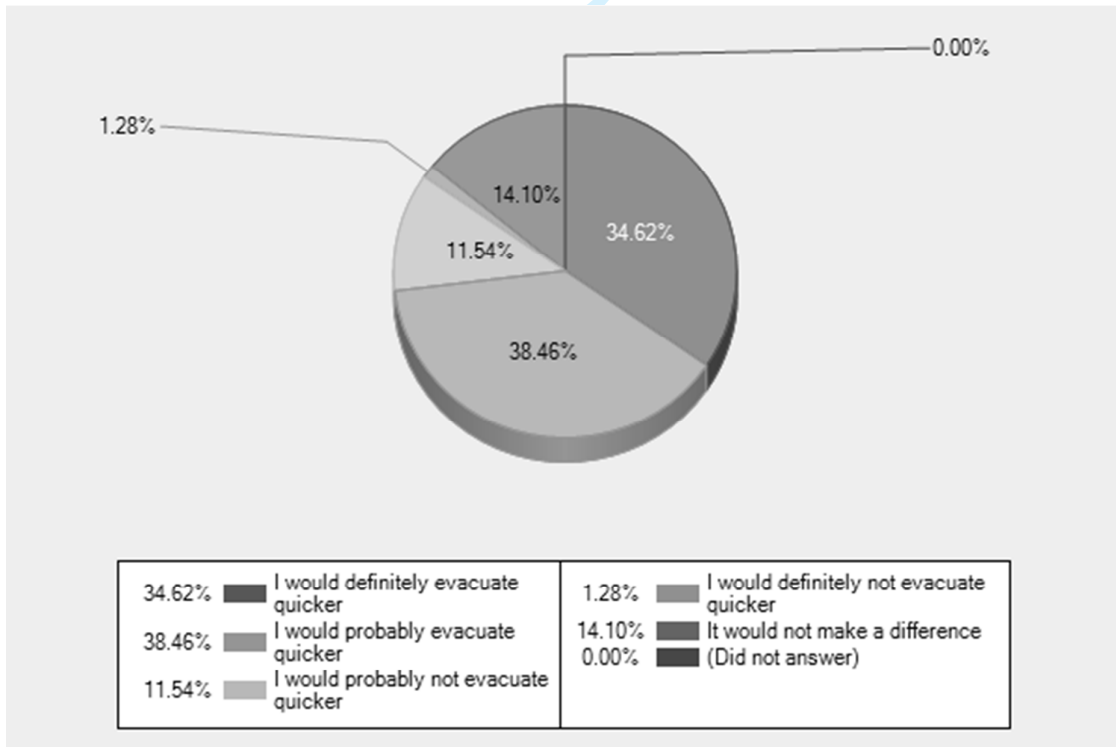


Figure 8 Results of evacuation speed if an alternate alarm was in place

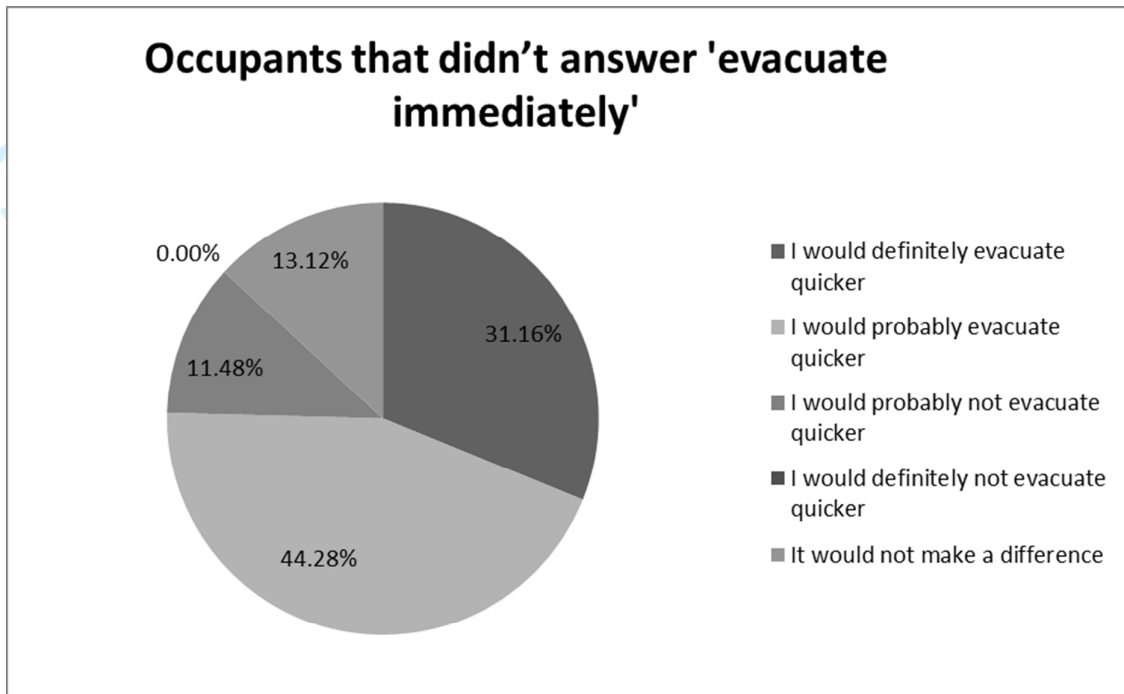


Figure 9 Would an alternate alarm make a difference to occupants' evacuation speed?

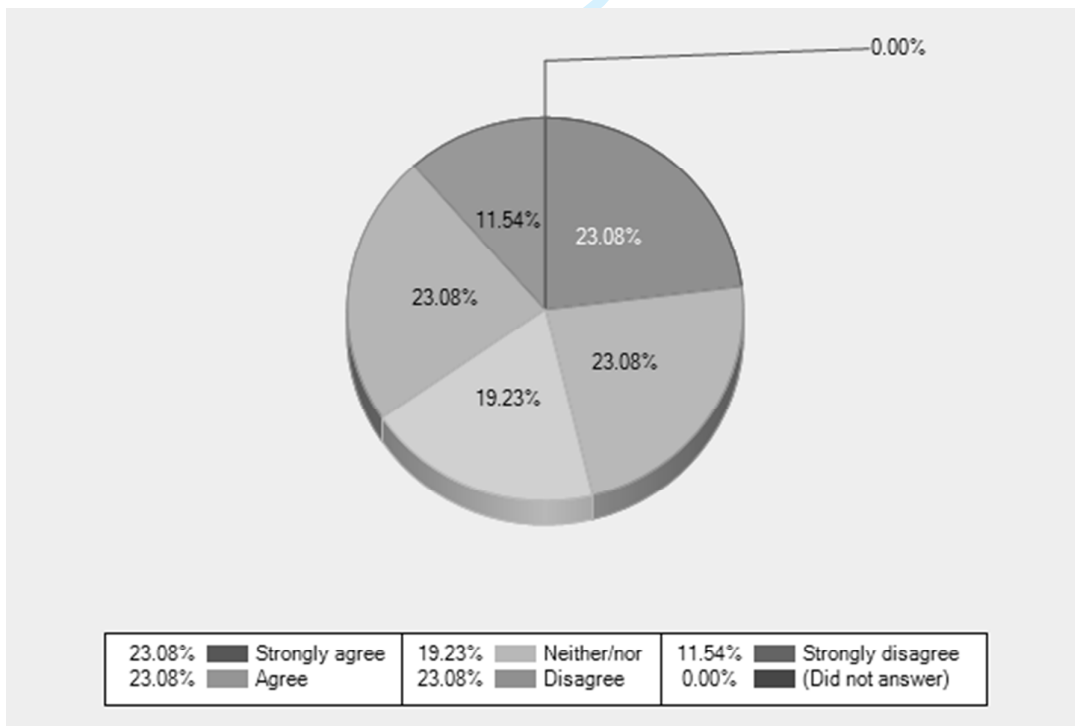


Figure 10 Occupants are well informed on the fire evacuation procedures within their building

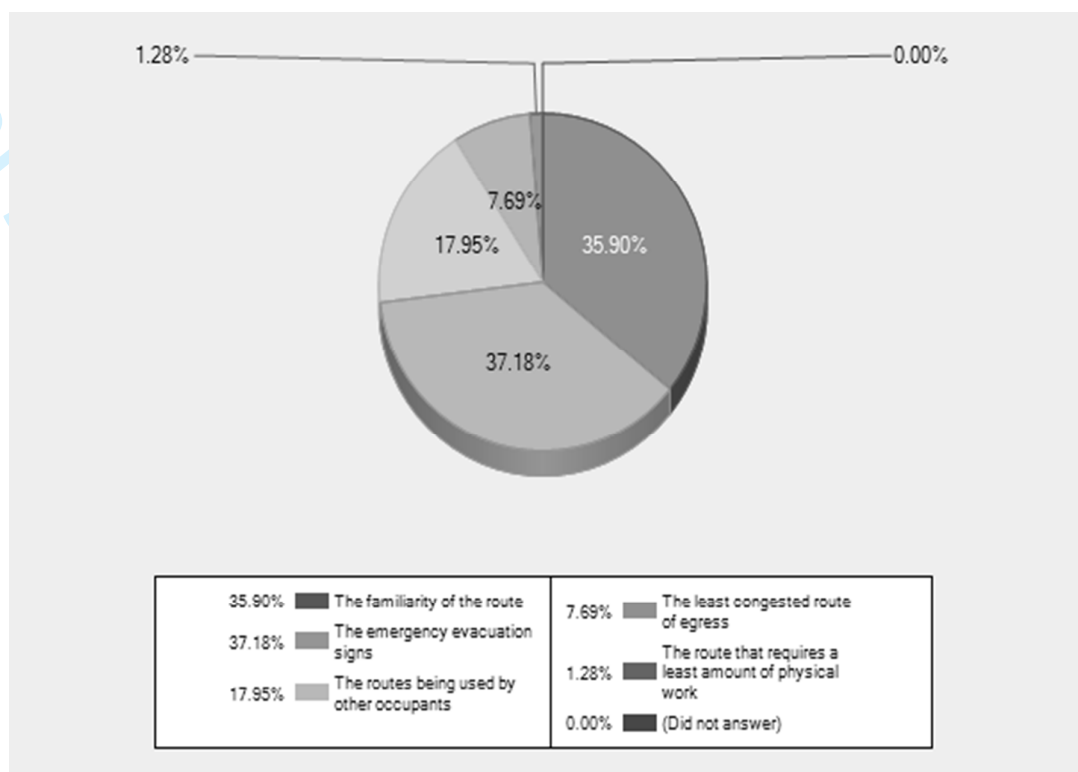


Figure 11 Factors affecting occupant's choice of egress method