



AUTHOR(S):

TITLE:

YEAR:

Publisher citation:

OpenAIR citation:

Publisher copyright statement:

This is the _____ version of an article originally published by _____
in _____
(ISSN _____; eISSN _____).

OpenAIR takedown statement:

Section 6 of the "Repository policy for OpenAIR @ RGU" (available from <http://www.rgu.ac.uk/staff-and-current-students/library/library-policies/repository-policies>) provides guidance on the criteria under which RGU will consider withdrawing material from OpenAIR. If you believe that this item is subject to any of these criteria, or for any other reason should not be held on OpenAIR, then please contact openair-help@rgu.ac.uk with the details of the item and the nature of your complaint.

This publication is distributed under a CC _____ license.

1 Streaming and 3D Mapping of Agri-Data on Mobile Devices

2 V. Stojanovic¹, R. Falconer^{1*}, J. Isaacs², D. Blackwood¹, D. Gilmour¹, D.
3 Kiezebrink³ and J. Wilson³

4 ¹ Abertay University, Arts, Media and Computer Games, Kydd Building, Bell Street, Dundee, DD1 1HG,
5 Scotland, UK

6 ² Robert Gordon University, Garthdee House, Garthdee Road, Aberdeen, AB10 7QB, Scotland, UK

7 ³ Soil Essentials Ltd, Hilton of Fern Farm, Brechin, DD9 6SB, Scotland, UK

8 9 Abstract

10 Farm monitoring and operations generate heterogeneous AGRI-data from a variety of different
11 sources that have the potential to be delivered to users ‘on the go’ and in the field to inform farm
12 decision making. A software framework capable of interfacing with existing web mapping services to
13 deliver in-field farm data on commodity mobile hardware was developed and tested. This raised key
14 research challenges related to: robustness of data streaming methods under typical farm connectivity
15 scenarios, and mapping and 3D rendering of AGRI-data in an engaging and intuitive way. The
16 presentation of AGRI-data in a 3D and interactive context was explored using different visualisation
17 techniques; currently the 2D presentation of AGRI- data is the dominant practice, despite the fact that
18 mobile devices can now support sophisticated 3D graphics via programmable pipelines. The testing
19 found that WebSockets were the most reliable streaming method for high resolution image/texture
20 data. From our focus groups there was no single visualisation technique that was preferred
21 demonstrating that a range of methods is a good way to satisfy a large user base. Improved 3D
22 experience on mobile phones is set to revolutionize the multimedia market and a key challenge is
23 identifying useful 3D visualization methods and navigation tools that support the exploration of data
24 driven 3D interactive visualisation frameworks for AGRI-data.

25 *Keywords:* Interactive Visualisation; Farm Management Integrated Systems; Precision
26 Agriculture; Data Aggregation; Mobile Devices; 3D Graphics

27
28
29
30
31

32 *Corresponding author at: School of Arts, Media & Computer Games, Abertay University, Kydd
33 Building, Bell Street, DD1 1HG, Dundee, Scotland, UK.

34
35 Email: r.falconer@abertay.ac.uk
36
37
38
39
40

41 **1. Introduction**

42 Delivering secure and sustainable provision of food, water and energy, particularly in
43 the face of climate change and reduced carbon targets is a huge challenge. Precision
44 Agriculture (PA) and sustainable intensification has been advocated as a scalable solution to
45 modern global food security challenges by saving time, energy, water and money (Karetsos
46 and Sideridis, 2014; Whitacre and Griffin, 2014; Santana et al., 2007). PA stemmed from the
47 desire to manage farms more sustainably. Traditionally PA has been restricted to those that
48 can afford the latest technology, but maturation and ubiquity of enabling digital and mobile
49 technologies are set to transform PA (Whitacre and Griffin, 2014; Karetsos and Sideridis,
50 2014; Butler 2006). This is supported by various UK, USA and EU strategies for encouraging
51 innovation in agriculture (e.g. UK Agri-Tech Strategy (HM Government, 2013) and
52 associated AGRIMETRICS (Tiffin, 2017) and EUs FIWARE (López-Riquelme *et al.*, 2016)
53 accelerators) supporting a revolution in the use of data science from “farm to fork”.

54 Precision Agriculture (PA) is tightly coupled to the Internet of Things (IoT) and converting
55 big data, originating from heterogeneous sources, into information is a key challenge (Mulla,
56 2013; Zhang et al., 2002). There is however a growing need for “on the go” decision-making
57 tools for in-field viewing of relevant farm data (Ying, 2012; Chittaro, 2006; Pombinho et al.,
58 2007). Mobile technology that interfaces with existing farm servers could deliver data that
59 offers early warnings of potential issues in the field e.g. assessing the risks of disease and pest
60 outbreaks or poor crop performance. The authors see such a mobile tool as complimenting
61 the rich landscape of Farm Management Information System (FMIS) presented by Fountas et
62 al., (2015) and illustrated in Fig 1. However, to progress there are two technical challenges
63 that need to be addressed:

- 64 • Streaming data efficiently from a farm server to a commodity mobile device

65 • Implementing and evaluating different interactive 2D and 3D visualisation methods
66 for the display of AGRI data on a mobile device

67 Previous mobile applications (*apps*) have been developed for farmers and agronomists, but
68 these apps are focused on specific needs (e.g. soil nutrient approximation), and utilise 2D
69 visualisation methods (Hopkins, 2013). Mobile devices (tablets and/or smart phones) are now
70 ubiquitous with more memory, faster processors and feature a programmable Graphic
71 Processing Unit (GPU) (Shebanow, 2013). GPUs can be programmed via special programs
72 called *shaders*, which permit sophisticated mobile graphics once reserved for video games
73 and PC-based visual simulations (Akenine-Möller et al., 2008; Falconer et al., 2015). Mobile
74 graphics hardware is designed to work with texture data efficiently. The benefits of using
75 high resolution aerial photography (Lange, 2001) and interactive 3D landscapes (Lovett et al.,
76 2015) for enhancing user engagement has been highlighted. Additionally mobile GPS
77 hardware can be exploited to ensure relevant data is delivered to users by linking GPS to the
78 Field of View (FoV) (Burigat and Chittaro, 2015; Tsiropoulos & Fountas 2015).

79 Recently (PIX 4D, 2016; Puri, 2016) released software to construct 3D textured Digital
80 Elevation Models (DEM) of FARM DATA, captured using unmanned aerial drone, or using
81 sensors. There is a growing recognition in the AGRI sector that 3D visualisation is a useful
82 tool as exemplified by Gepiel et al., (2015), where a PC-based 3D visualization of in-field
83 sensor data is created. A review of ICT-AGRI ERA-NET EU funded projects for 2010 to
84 2015 features few utilising 3D content with the exception of VAROS (Jordan 2015). Further,
85 there is a paucity of mobile applications for PA with interactive 3D visualisation and this is
86 primarily a consequence of two issues. Firstly, the skills set associated with 3D graphics does
87 not intersect with the traditional AGRI sector. Secondly, the real benefits of mobile 3D
88 content have yet to be discovered in this sector. At the time of writing, the authors were not

89 able to find a specific example of a 3D visualization specifically for crop yield analysis on a
90 mobile platform.

91 A software framework for streaming and rendering data in 3D, with potential applications to
92 crop scouting, is presented based on mobile game technology. The software framework
93 combines virtual texturing and streamed farm data to inform ‘on the go’ decision making.
94 The technology is demonstrated using crop yield data and high resolution aerial photography
95 although it can in principle display other AGRI data. The proposed AGRI-AG mobile app,
96 enabled only by the multidisciplinary convergence of game technology with AGRI data, has
97 the potential to transform in-field crop monitoring and inform early decision-making by
98 growers to improve efficiency/profitability of the farming industry, providing healthier, more
99 affordable food for the future.

100 **2. Software Development**

101 *2.1 Application*

102 The Model Viewer Controller (MVC) is a common and well documented software design
103 pattern (Vlissides et al., 1994) and this methodology guided the development of the app.. The
104 MVC pattern is widely used and suitable for applications that require user input via a
105 graphical user interface (GUI). The MVC pattern is also the default and recommended
106 software design pattern for developing Android applications (Phillips and Hardy, 2013).

107 *Insert Figure 1 here*

108 Figure 1 illustrates how the AGRI-AG app can integrate into the existing FMIS landscape,
109 which is reviewed in Fountas *et al.*, (2015), to support crop monitoring illustrated here by
110 delivering *yield maps*.

111 *Insert Figure 2 here*

112 Fig. 2 shows the components of the AGRI-AG application, implemented as an Android
113 mobile app and highlighting the data streaming, processing and rendering stages.

114 AGRI-AG user input is facilitated through the mobile app's user interface as well as GPS
115 functionality. Users can navigate the 3D scene using gestures for zooming, rotating and
116 panning the 3D scene. The GPS coordinates are used to centre the users view in the 3D scene,
117 which acts as a virtual camera so that users can freely navigate the scene. The different
118 methods for AGRI-data presentation is by the toggling of radio buttons.

119 The 3D scene comprise a textured Digital Elevation Model (DEM) and different methods to
120 present yield data (in 2D and 3D). Two streaming methods delivering large textures e.g. high
121 resolution aerial photography from UAV, but this could also be satellite infrared imagery for
122 assessing crop health, are investigated. Although the desire is to integrate the mobile
123 technology with existing farm servers, for this research the test data (spatio-temporal yield
124 data and high resolution imagery) was stored on a remote server located at the university, as
125 the PA company is a live business operation.

126 *2.2 Data Format Specifications*

127 The main data types that AGRI-AG deals with are image (textures) and text files. The image
128 files are used to generate the 3D geometry for the Digital Elevation Model, as well to provide
129 texture overlays for the yield data and aerial photography. The image data files are JPG
130 image files which are faster to decode on the mobile tablet hardware and have reasonable
131 compression (Thiagarajan, 2012). The text files store yield data values that are parsed and
132 used to generate representative 3D primitives. The text used to store the sampled yield data is
133 stored as a standard CSV (Comma Separated Value) text file. The streamed data from the
134 server is encoded as Base64 string data files. This is a convenient format that encodes the
135 data to a Base64 hexadecimal ASCII file encoding. This format is used because it requires

136 less calls to be made to the server and the required data is packaged and sent as a single
137 Base64 data file from the server to the client, using either long-polling HTTP or WebSockets-
138 based client/server communication model (Popov, 2009). Presently the yield maps used for
139 the visualisation by AGRI-AG are not generated in real time. Instead they were generated
140 offline using yield mapping software, GS+ (Gammadesign Software, 2016). Generating yield
141 maps require the use of *Kriging* algorithms, which are compute intensive, but could be a
142 prime candidate for parallelisation on mobile devices in the future. The CSV file is used i) as
143 input into a Block Kriging algorithm to generate the interpolated yield map images
144 mimicking what would be done on the farm server. These images are then exported, along
145 with a standard colour table used by GS+, as JPEG image files, and transferred to the test
146 server which can be downloaded by the app as needed. Figure 3 below illustrates the process
147 of acquiring the yield data which is then presented in various forms as described below.

148

149

Insert Figure 3

150 *2.3 The 3D Rendering Pipeline and Data Visualisation*

151 The AGRI-AG app features various 2D and 3D visualisation methods based either on
152 textures or 3D primitives, that represent the wider agricultural context and crop yield data.
153 Since visualisation methods can be prohibitively expensive to compute on the CPU, the GPU
154 is used to offload the required processing from the CPU. The visualisation methods used for
155 AGRI-AG are implemented in a *shader* written in GLSL (OpenGL Shading Language, a C-
156 like programming language for shaders (Munshi, 2008)) as part of the 3D graphics
157 programmable pipeline. *Vertex shader* code is used to define how the GPU will handle the
158 vertex data associated with the 3D objects (Brothaler, 2013). The vertex shader computes the
159 vertex position, vertex normal and the texture coordinates of a 3D object being rendered. This
160 data is streamed to the *fragment shader* which computes the final pixel colour based on the
161 object colour, texture (image data) and shading model used. Basic Gouraud shading is

162 implemented on a per-vertex basis, and is used to combine the texture, scene lighting and 3D
163 object colour (Gouraud, 1971).

164 *2.3.1 Texture-based Landscape Visualisation*

165 The 3D Digital Elevation Model (DEM) that captures the topography of the landscape is
166 represented using an image (Mach and Patschek, 2007). This image can either be taken by a
167 UAV or obtained via third party sources (such as Ordnance Survey UK). Increasingly this
168 type of image data is large in terms of resolution and must be resized and resampled before
169 use on mobile devices. Using standard graphics programming approaches 2D textures, also
170 represented as an image, can be mapped onto the 3D DEM. These 2D textures can be either
171 high resolution aerial photography, capturing features of the landscape, or colour-mapped
172 yield data derived from block Kriging algorithms. To increase rendering speeds, the image
173 data (both DEM and imagery) is discretized into uniform regions of smaller tiles (Fig 4). The
174 AGRI-AG texture management component selects appropriate resolution tiles using Level of
175 Detail (LOD) methods. The tile selected is based on the distance between the viewer
176 (camera) and the land tile as illustrated in Fig. 5. Methods for streaming and downloading the
177 tiles are presented in section 2.4.

178 *Insert Figure 4 & 5*

179 *2.3.2 3D Yield Map Visualisation*

180 A 3D yield surface can be used to convey the heterogeneity in crop yield by both colour
181 and/or height. The yield data is used to extrude the pixels based on the crop yield value. This
182 generates a 3D surface where low and high heights correspond to low and high yields
183 respectively. Fig. 6 shows the 2D and 3D yield maps for comparison. The shading model uses
184 a lookup table of pseudo-normals to increase the rendering speeds during visualisation. This
185 was implemented primarily as an optimization method for running the app on lower-end
186 mobile tablets, as GPU does not need to compute the vertex normal directions every frame.

187

Insert Figure 6

188 *2.3.3 3D Spatially Averaged (Aggregated) Data Visualisation*

189 One way to visualise large amounts of quantitative spatial data is using spatial averaging
190 methods (Spence, 2001). The number of yield data points to average are specified and the
191 appropriate block/area size is then calculated. The data is assumed to be homogeneously
192 distributed, which is a fair assumption for this type of data. At the centre of each block a 3D
193 cuboid is generated, the height of which is scaled by the calculated averaged yield value.
194 Other geometrical primitives can be used such as cones, spheres or cylinders. The aggregated
195 data is read as raw data from a *Coma Separated Value* (CSV) data file, which can be
196 downloaded from the server, and includes the yield, latitude and longitude values. The fewer
197 points per block will result in more 3D object primitives to be displayed (Fig 7). The
198 aggregated 3D visualisation method also uses “pseudo-normal” calculations for surface
199 shading. Therefore, all 3D objects have the same facing vertex normals thus they are all lit
200 and shaded in one direction.

201

Insert Figure 7

202 *2.4 Texture Streaming Methods*

203 Methods implemented in AGRI-AG for streaming high resolution data from the farm server
204 include HTTP and WebSockets (Andersson and Göransson, 2012). HTTP is a default
205 standard for data transfer between web connected applications on mobile devices, and
206 WebSockets are currently becoming more widely used and are an already adopted standard
207 (Grigorik 2013). HTTP based streaming makes use of "long polling" HTTP method where a
208 connection to the server is established and the client requests data. After a set time-out
209 period, the connection is closed and the client has to connect to the server again.
210 Alternatively, WebSockets allow for a constant connection to be maintained between the

211 client and server. WebSockets make use of bi-directional communication between the client
212 and the server, and the connection is kept constantly open. Data transmission is considered to
213 be low-bandwidth as the data packets are transmitted via the WebSockets protocol run on top
214 of a single TCP connection (Grigorik, 2013). Fig. 8 illustrate how the HTTP long-polling and
215 WebSockets communication works between the client and server

216 *Insert Figure 8*

217 *2.5 AGRI-AP Performance Evaluation*

218 *2.5.1 Benchmarking of app and data visualisation techniques*

219 As the aim was to ensure interactivity of the app two key performance indicators were
220 measured for the different visualisation methods: Frames per Second (FPS) and the
221 Milliseconds per Frame (MPFS). The RAM and CPU usage were also monitored. The mobile
222 tablets used for testing were the Asus Google Nexus 7 and HTC Google Nexus 9 tablets.
223 These tablet models were chosen because they provide a good range for comparison across
224 the hardware capability spectrum. The Asus Google Nexus 7 tablet is an older generation
225 Android mobile tablet with support for version 4.3 of the Android operating system (called
226 “Jelly Bean”). It features a 1.51 GHz quad-core Krait 300 CPU, 2 GB DDR3L RAM and a
227 Qualcomm 400 MHz quad-core Adreno 320 GPU. The HTC Google Nexus 9 tablet is a more
228 powerful Android tablet featuring support for Android 5.0.1 (called “Lollipop”). The Nexus 9
229 features a NVIDIA Tegra K1 CPU (2.3 GHz dual-core 64-bit “Denver”), 2 GB LPDDR3-
230 1600 RAM and a NVIDIA Kepler GPU. The most significant difference between the two
231 Nexus 7 and 9 tablets is the support for 3G/4G mobile networking supported only by the
232 Nexus 9. All of the profiling was done using the ADT debug tools within the Eclipse
233 integrated development environment (IDE).

234

235 *2.5.2 Data Streaming*

236 Two use cases were selected for evaluating the streaming methods: high connectivity (via
237 Wi-Fi) and low connectivity (via 3G). Testing the steaming in these two environments
238 reflected the conditions in which the app would be used. The chosen high-connectivity
239 environment was the Abertay University campus and the streaming methods were tested
240 using a standard Wi-Fi network connection. The chosen low-connectivity environment was
241 Tentsmuir Forest in Fife, Scotland (see Fig. 9).

242

243 *Insert Figure 9*

244

245 The HTC Google Nexus 9 was used as the main tablet for the low and high-connectivity
246 environment testing. The Google Nexus 9 tablet was used as it features support for 3G/4G
247 mobile communication, which is essential for testing in the field. The streaming testing
248 protocol included downloading a single large 2048x2048 compressed JPEG image tile for a
249 given DEM tile region and recording the time to download.

250

251 *2.5.3 User evaluation*

252 A focus group was set up to determine the user perceptions of the different visualisation
253 techniques. The focus group was recruited to reflect the potential user base and included
254 digital and non-digital natives. The focus group involved downloading the app on the user's
255 own devices and trialling the functionality and visualisation methods. The qualitative testing
256 focussed on usability, visual preference and overall impact – which participants worked
257 through at their own pace. There were eight participants in the user testing group, which

258 included farmers, agronomists, PA technologists and academics. The questionnaire is
259 presented in App 1.

260

261 **3. Results**

262 **3.1 Data Visualisation techniques**

263 Fig. 10 shows the results of the visualisation techniques implemented to display the yield data
264 for a given field. The 2D colour coded map Fig. 10 a) is the most familiar style to farmers
265 and agronomists.

266 *Insert Figure 10*

267

268 Fig. 11 shows an “exploded view” of time series yield data for the same field. This
269 emphasises the customisability of visualisation of AGRI data afforded by the programmable
270 pipeline on mobile devices. Alternative methods of animating time series data is shown in
271 Fig. 12.

272 *Insert Figure 11*

273

274 *Insert Figure 12*

275

276 **3.2 Performance Results**

277 Fig. 13 - 16 show the average FPS, MFPS, RAM usage and CPU usage results for each of the
278 visualisation methods tested on the Nexus 7 and 9 tablet devices. Higher FPS values indicate
279 better rendering performance, while smaller MFPS value indicate higher rendering efficiency
280 (less time spent) rendering each frame. Lower CPU and RAM usage values are preferred.
281 Each of the performance tests were replicated 15 times to obtain a distribution. The data is

282 not normally distributed therefore error bars are not presented on the charts. For the
283 aggregated data visualisation methods, the point sample size of 10, 30 and 50 was chosen for
284 the benchmarking which results in 1546, 537, 338 3D primitives to render. RAM usage is far
285 lower on the Nexus 9 than on the Nexus 7 due to the use of the new runtime ART VM, which
286 has more optimizations than the previous VM version Dalvik which is used by the Nexus 7.
287 Interactive performance on the Nexus 9 is slightly worse than on the Nexus 7. This is because
288 the application was developed originally for version 4.3 of the Android operating system
289 running on the Nexus 7 tablet. Nexus 9 uses version 5 of the Android operating system
290 (called “Lollipop”) and also uses a completely re-designed version of the runtime virtual
291 machine (VM) called ART (Toombs, 2013). The code was not ported nor optimized
292 specifically to make use of any of the new features of version 5 of the Android operating
293 system.

294

295 *Insert Figure 13*

296 *Insert Figure 14*

297 *Insert Figure 15*

298 *Insert Figure 16*

299

300 **3.3 Texture Streaming Results**

301 The time taken to download the 2048x2048 compressed JPEG texture image using HTTP and Web
302 Sockets in a high and low connectivity environment is presented in Fig. 17. The connectivity
303 results show that in a high connectivity environment, the use of WebSockets for streaming on
304 the Nexus 9 tablet is significantly faster in comparison to HTTP-based streaming (see Fig.
305 17). Testing in a low-connectivity environment was performed using only the Nexus 9 tablet
306 as it features support for 3G communication. The results obtained from the low-connectivity

307 environment show that the usage of WebSockets-based streaming is faster than HTTP-based
308 streaming. The performance variances found in the WebSockets-based streaming method
309 using the 3G network connection protocol are due to non-standardized support for
310 WebSockets over the 3G communication network. This has been researched and reported by
311 (Estep, 2013), and his research concludes that WebSockets performance can vary
312 significantly depending on the network communication protocol that is being used.

313

314 *Insert Figure 17*

315

316 **3.4 Qualitative User Testing Results**

317 The app was tested by exploring and monitoring crop yields of a single field over time and
318 with different presentation modes. A summary of the testing together with some statements
319 from users is presented The user interface was described as having a clean layout and
320 graphical style but there was however some issues with the navigation being non intuitive.
321 The users requested both gesture based navigation and a navigation wheel such as in Google
322 maps. With regard to visual preference the users found that the use of aerial photography
323 overlaid on top of a 3D digital elevation model was beneficial for contextualising the main
324 features (e.g. farm fields, buildings, lochs). It was also noted that the texture resolution
325 should be higher and more crisp when the user zooms in. Most users rated the two
326 interpolated crop yield data time series renders with the highest preference. A suggestion was
327 made to include an "exploded view" of the yield data for the different years, as well as the
328 ability to playback and through time series using a video-like playback interface. These
329 features have been added for the final release version of the app as shown in Fig. 11 and 12.
330 The overall impact section revealed that users were generally satisfied with the app, but

331 improvements could be made by incorporating other data such as chemistry (PH, nutrient),
332 soil values / soil texture, rainfall per week. One test participant wrote on the feedback form:
333 *“Both methods (top down and 3D view) of the land area are useful. What I like most is that*
334 *the 3D terrain model could show field terrain better than 2D (map).”* Some users found the
335 3D spatially averaged visualisation method to be particularly engaging, especially when
336 compared to the 2D yield maps. Another participant stated that what they liked most about
337 the app was *“rapid visualisation of yield data”*, but that they disliked the *“3D view of*
338 *aggregated data”*. The ability to animate through time series data was also positively
339 received. The users found it useful to switch between the visualisation methods seamlessly
340 and in real-time. One tester stated in the feedback that *“The tilted top-down view is easier to*
341 *see and to control but that a top-down view is also useful in certain scenarios. (App) doesn’t*
342 *seem to have noticeable performance hits (when viewing terrain) and greatly aids the user in*
343 *determining where they are looking”*. Reservations were made about the lack of gesture based
344 scene navigation, the method for zooming in and out of the scene (as this was tied to button
345 controls rather than gesture based controls). One tester commented that *“Buttons have*
346 *confusing terminology (names) and that vertical axis rotation is opposite to what I expect.”*,
347 and another mentioned that *“A reset button for navigation should be added along with*
348 *gesture based control”* and that *“pinch (zoom) function would be nice”*. The navigation
349 control issues were addressed and changed to complete gesture based control after the
350 feedback was provided.

351

352 **4. Discussion**

353 The research findings have shown that high-resolution aerial photography and crop yield data
354 can be streamed from a remote server and displayed in an interactive context on mobile
355 devices. It is shown in both low and high connectivity environments that WebSockets are

356 significantly faster than using HTTP-based streaming. WebSockets make use of bi-
357 directional communication between the client and the server. The connection between the
358 server and the client is kept alive throughout the communication period. Therefore data can
359 be transmitted between the client and the server simultaneously without opening and closing
360 the connection. This makes the WebSockets communication protocol comparable to low-
361 latency network data transfer and has increased the protocols popularity for use in
362 applications that require low-latency real-time communication (Grigorik, 2013).

363 Further the application performance results show that the implemented visualisation methods
364 can be rendered in real-time. The issues highlighted by Chen et al 2015 with respect to data
365 analysis and presentation being a bottleneck in PA can to some degree be overcome with the
366 presented framework. The varying preferences with respect to visualisation techniques
367 further support that a suitable way forward is providing the users with a selection of methods
368 to choose from. It is suspected that those that are used to 3D visualisation and considered
369 digital natives may find the 3D methods more intuitive whilst others do not. The flexible
370 customisation of data presentation, achieved by programmable pipelines, is useful for a large
371 user base where new 'effects' can be tried out.

372 Improved 3D experience on mobile phones is set to revolutionize the multimedia market and
373 a key challenge is identifying useful 3D visualization methods and navigation tools that
374 support the exploration of data driven 3D interactive visualisation frameworks.

375 **5. Conclusion**

376 The developed AGRI-AG application demonstrates that mobile devices are capable of
377 streaming and displaying 3D maps of farm AGRI data, in novel ways on commodity mobile
378 devices, within an interactive 3D context. This may benefit stakeholders in terms of enhanced
379 engagement and delivery of context-aware and relevant data. Different data visualisation
380 techniques have been described, implemented and assessed for presenting farm data and the

381 wider geographical context. The power consumption and the effect AGRI-AG has on the
382 mobile device battery life was not determined. Extensive in-field testing of the application to
383 specific agricultural tasks is also part of future work. The AGRI-AG application can be
384 improved by having better integration with web database services for accessing aerial
385 imagery and geospatial data in real-time as well as for uploading data to a farm server. The
386 core platform can be applied to many other spatial data-rich sectors including environmental
387 monitoring and homeland security.

388 **References**

- 389 Akenine-Möller, T., Haines, E., & Hoffman, N. 2008. Real-time rendering. CRC Press.
- 390 Andersson S. and Göransson, J. 2012. Virtual Texturing with WebGL.
391 <<http://publications.lib.chalmers.se/records/fulltext/155126.pdf>>
- 392 Brothaler, K. 2013. OpenGL ES 2 for Android. The Pragmatic Programmers.
- 393 Burigat, S., & Chittaro, L. 2007. Geographical Data Visualization on Mobile Devices for User's
394 Navigation and Decision Support Activities. In Spatial Data on the Web (pp. 261-284).
395 Springer Berlin Heidelberg.
- 396 Butler, D. 2006. Virtual globes: The web-wide world. *Nature*, 439(7078), 776-778.
- 397 Calhoun, D. 2011. When to Base64 Encode Images (and When Not To).
398 <<http://davidbcalhoun.com/2011/when-to-base64-encode-images-and-when-not-to/>>
- 399 Chehimi, F., Coulton, P., & Edwards, R. 2005. Evolution of 3D games on mobile phones. In Mobile
400 Business, 2005. ICMB 2005. International Conference on (pp. 173-179). IEEE.
- 401 Chen, N., Zhang, X., & Wang, C. (2015). Integrated open geospatial web service enabled cyber-
402 physical information infrastructure for precision agriculture monitoring. *Computers and*
403 *Electronics in Agriculture*, 111, 78-91.
- 404 Chiles, J. P., & Delfiner, P. 2009. Geostatistics: modeling spatial uncertainty (Vol. 497). John Wiley
405 & Sons.
- 406 Chittaro, L. 2006. Visualizing information on mobile devices. *Computer*, 39(3), 40-45.
- 407 Dunlop, R. 2005. FPS Versus Frame Time. MVPS.
- 408 Estep, E. 2013. Mobile html5: efficiency and performance of websockets and server-sent
409 events. School of Science Double Degree Programme NordSecMob, Aalto University.

- 410 Falcao, A. O., dos Santos, M. P., & Borges, J. G. 2006. A real-time visualization tool for forest
411 ecosystem management decision support. *Computers and electronics in agriculture*, 53(1), 3-
412 12.
- 413 Falconer RE, Isaacs, JP, Blackwood, DJ, & Gilmour, DJ. .2015. The role of interactive visualisation
414 in developing inclusive technology for sustainability of built environment. Carlos Nunes Silva
415 (Ed.). *Emerging Issues, Challenges, and Opportunities in Urban E-Planning*. Hershey, PA:
416 IGI Global. doi:10.4018/978-1-4666-8150-7
- 417 Falconer, R. E., & Houston, A. N. 2015. Visual Simulation of Soil-Microbial System Using GPGPU
418 Technology. *Computation*, 3(1), 58-71.
- 419 Fountas, S., Carli, G., Sørensen, C. G., Tsiropoulos, Z., Cavalaris, C., Vatsanidou, A., ... & Tisserye,
420 B. (2015). Farm management information systems: Current situation and future perspectives.
421 *Computers and Electronics in Agriculture*, 115, 40-50.
- 422 Ge, R., Feng, X., & Cameron, K. W. 2005. Improvement of power-performance efficiency for high-
423 end computing. In *Parallel and Distributed Processing Symposium, 2005. Proceedings. 19th*
424 *IEEE International* (pp. 8-pp). IEEE.
- 425 Grigorik, I. 2013. *High Performance Browser Networking: What every web developer should know*
426 *about networking and web performance*. O'Reilly Media, Inc.
- 427 GS+ : Geostatistics for the Environmental Sciences. (2016). Gammadesign Software.
428 Available online: <https://www.gammadesign.com/> . Last Accessed on 22/09/2016.
- 429 HM Government. (2013). *A UK Strategy for Agricultural Technologies*. Available online:
430 [https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/227259/9643-](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/227259/9643-BIS-UK_Agri_Tech_Strategy_Accessible.pdf)
431 [BIS-UK_Agri_Tech_Strategy_Accessible.pdf](https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/227259/9643-BIS-UK_Agri_Tech_Strategy_Accessible.pdf) - Last Accessed 22/02/2017)
- 432 Hopkins, M. 2013. 20 Best Mobile Apps for Agriculture. <[http://www.croplife.com/editorial/matt-](http://www.croplife.com/editorial/matt-hopkins/20-best-mobile-apps-for-agriculture/)
433 [hopkins/20-best-mobile-apps-for-agriculture/](http://www.croplife.com/editorial/matt-hopkins/20-best-mobile-apps-for-agriculture/)>
- 434 Isaacs, J. 2011. *Sustainability Assessment and Visualisation in Urban Environments*. PhD Thesis.
435 University of Abertay Dundee.
- 436 Isaacs, J. P., Blackwood, D. J., Gilmour, D., & Falconer, R. E. 2013. Real-Time Visual Simulation of
437 Urban Sustainability. *International Journal of E-Planning Research (IJEPR)*, 2(1), 20-42.
- 438 Karetsos, S., Costopoulou, C., & Sideridis, A. 2014. Developing a smartphone app for m-government
439 in agriculture. *Agrárinformatika/Journal Of Agricultural Informatics*,5(1), 1-8.
- 440 Koskela, T., & Vajus-Anttila, J. 2015. Optimization Techniques for 3D Graphics Deployment on
441 Mobile Devices. *3D Research*, 6(1), 1-27.
- 442 Lange, E. 2001. The limits of realism: perceptions of virtual landscapes. *Landscape and urban*
443 *planning*, 54(1), 163-182.
- 444 López-Riquelme, J. A., Pavón-Pulido, N., Navarro-Hellín, H., Soto-Valles, F., & Torres-Sánchez, R.
445 (2016). A software architecture based on FIWARE cloud for Precision Agriculture.
446 *Agricultural Water Management*.

- 447 Lovett, A., Appleton, K., Warren-Kretzschmar, B., & Von Haaren, C. 2015. Using 3D visualization
448 methods in landscape planning: An evaluation of options and practical issues. *Landscape and*
449 *Urban Planning*, 142, 85-94.
- 450 Lunden, I. 2014. Gartner: 195M Tablets Sold In 2013, Android Grabs Top Spot From iPad With 62%
451 Share. <[http://techcrunch.com/2014/03/03/gartner-195m-tablets-sold-in-2013-android-grabs-](http://techcrunch.com/2014/03/03/gartner-195m-tablets-sold-in-2013-android-grabs-top-spot-from-ipad-with-62-share/)
452 [top-spot-from-ipad-with-62-share/](http://techcrunch.com/2014/03/03/gartner-195m-tablets-sold-in-2013-android-grabs-top-spot-from-ipad-with-62-share/)>
- 453 Martinez, K., & Cupitt, J. 2005. VIPS-a highly tuned image processing software architecture. In
454 *Image Processing, 2005. ICIP 2005. IEEE International Conference on* (Vol. 2, pp. II-574).
455 IEEE.
- 456 McLachlan, P. 2013. On Mobile, Data URIs are 6x Slower than Source Linking (New Research). <
457 <http://dev.mobify.com/blog/data-uris-are-slow-on-mobile/>>
- 458 Mulla, D. J. 2013. Twenty five years of remote sensing in precision agriculture: Key advances and
459 remaining knowledge gaps. *Biosystems Engineering*, 114(4), 358-371.
- 460 Munshi, A., Ginsburg, D., & Shreiner, D. 2008. *OpenGL ES 2.0 programming guide*. Pearson
461 Education.
- 462 NetMarketShare. 2016. Mobile/Tablet Operating System Market Share.
463 <[https://www.netmarketshare.com/operating-system-market-](https://www.netmarketshare.com/operating-system-market-share.aspx?qprid=8&qpcustomd=1)
464 [share.aspx?qprid=8&qpcustomd=1](https://www.netmarketshare.com/operating-system-market-share.aspx?qprid=8&qpcustomd=1)>
- 465 Phillips, B., & Hardy, B. (2013). *Android Programming: The Big Nerd Ranch Guide*. Pearson
466 Education.
- 467 Pombinho, P., Ana, M., Afonso, P., Carmo, M. B., & Grande, C. 2007. Geo-referenced Information
468 Visualization on Mobile Devices.
- 469 Popov, S. 2009. When you should use base64 for images.
470 <<http://www.stoimen.com/blog/2009/04/23/when-you-should-use-base64-for-images/>>
- 471 Santana, F. S., Murakami, E., Saraiva, A. M., & Correa, P. L. 2007. A comparative study between
472 precision agriculture and biodiversity modelling information systems. In *World Conference*
473 *on Computers in Agriculture and Natural Resources (EFITA)* (pp. 1-6).
- 474 Shebanow, M. 2013. An evolution of mobile graphics. Keynote talk at High Performance Graphics.
- 475 Siart, C., Bubenzer, O., & Eitel, B. 2009. Combining digital elevation data (SRTM/ASTER), high
476 resolution satellite imagery (Quickbird) and GIS for geomorphological mapping: A multi-
477 component case study on Mediterranean karst in Central Crete. *Geomorphology*, 112(1), 106-
478 121.
- 479 Siebert, S., & Teizer, J. 2014. Mobile 3D mapping for surveying earthwork projects using an
480 Unmanned Aerial Vehicle (UAV) system. *Automation in Construction*, 41, 1-14.
- 481 Spence, R. 2001. *Information visualization* (Vol. 1). New York: Addison-Wesley.

482 Thiagarajan, N., Aggarwal, G., Nicoara, A., Boneh, D., & Singh, J. P. 2012. Who killed my battery?:
483 analyzing mobile browser energy consumption. In Proceedings of the 21st international
484 conference on World Wide Web (pp. 41-50). ACM.

485 Tiffin, R. (2017, February). Agrimetrics: The World's First Big Data Center for the Agri-Food
486 Industry. In 2017 AAAS Annual Meeting (February 16-20, 2017). aaas.

487 Toombs, C. 2013. Meet ART, Part 2: Benchmarks - Performance Won't Blow You Away Today, But
488 It Will Get Better. Android Police. [http://www.androidpolice.com/2013/11/12/meet-art-part-
489 2-benchmarks-performance-wont-blow-away-today-will-get-better/](http://www.androidpolice.com/2013/11/12/meet-art-part-2-benchmarks-performance-wont-blow-away-today-will-get-better/)

490 Vlissides, J., Helm, R., Johnson, R., & Gamma, E. (1995). Design patterns: Elements of reusable
491 object-oriented software. Reading: Addison-Wesley, 49(120), 11.

492 Whitacre, B. E., Mark, T. B., & Griffin, T. W. 2014. How Connected are Our Farms?. *Choices*, 29(3).

493 Ying, F., Mooney, P., Corcoran, P., and Winstanley, A. C. 2012. Dynamic Visualization of Geospatial
494 Data on Small Screen Mobile Devices (pp. 77-90). Springer Berlin Heidelberg.

495 Zhang, N., Wang, M., & Wang, N. 2002. Precision agriculture—a worldwide overview. *Computers
496 and electronics in agriculture*, 36(2), 113-132.

497

498

499

501 **Appendix A –User Testing Questionnaire**

502 **Insert Appendix B Image 1**

503 **Insert Appendix B Image 2**

504 **Insert Appendix B Image 3**

505 **Insert Appendix B Image 4**

506 **Insert Appendix B Image 5**

507 **Insert Appendix B Image 6**

508

509 **Acknowledgements**

510 The authors would like to thank SAGES, Innovate UK and Soil Essentials Ltd for their
511 financial support and collaboration in this project.

512

513 **Figure Captions**

514

515 **Figure 1:** Example integration of the AGRI-AG app, and related app inputs, into an existing
516 FMIS. Adapted from Fountas et al 2015.

517 **Figure 2:** Flowchart diagram illustrating the key components of the AGRI-AG framework.

518

519 **Figure 3:** The yield map generation process using offline pre-processing. The offline
520 generation of yield maps is done using GS+ software, where the generated yield map along
521 with the colour table are exported as image files to be used in the main AGRI-AG interactive
522 visualisation scenario. The yield map image data can be used for both 2D and 3D projections
523 for visualisation purposes of stakeholder engagement.

524

525 **Figure 4:** Example of the LOD tile selection for AP imagery used in AGRI-AG.

526

527 **Figure 5:** Correspondence between a) the location of the selected farmland area, b) tiled
528 aerial photography image data and c) the tiled digital elevation model.

529

530 **Figure 6:** Visual differences between the 3D (left) and 2D (right) yield map visualisation
531 methods.

532

533 **Figure 7:** The spatially averaged algorithm using 1 point per block shown within the 3D
534 context and showing Lat Long coords in top left. The GUI layout is also shown.

535

536 **Figure 8:** Illustration showing communication between client device and server using a)
537 HTTP Long-Polling based and b) WebSockets-based connectivity methods.

538

539 **Figure 9:** Pictures from the low-connectivity testing site in Tenstmuir Forest, Fife, Scotland.

540

541 **Figure 10:** Examples of the three data visualisation techniques, a) 2D map b) 3D map and c)
542 aggregated 3D visualisation

543

544 **Figure 11:** Examples exploded display of yield time series data.

545

546 **Figure 12:** Frames of a time animation of the yield data

547

548 **Figure 13:** Average FPS performance result.

549

550 **Figure 14:** Average MFSP performance result.



551


552 **Figure 15:** Average RAM usage performance result.



553



554 **Figure 16:** Average CPU usage performance result.

555 **Figure 17:** High and low-connectivity environment testing results on the Nexus 9 tablet. The
556 milliseconds correspond to the elapsed image texture download time.

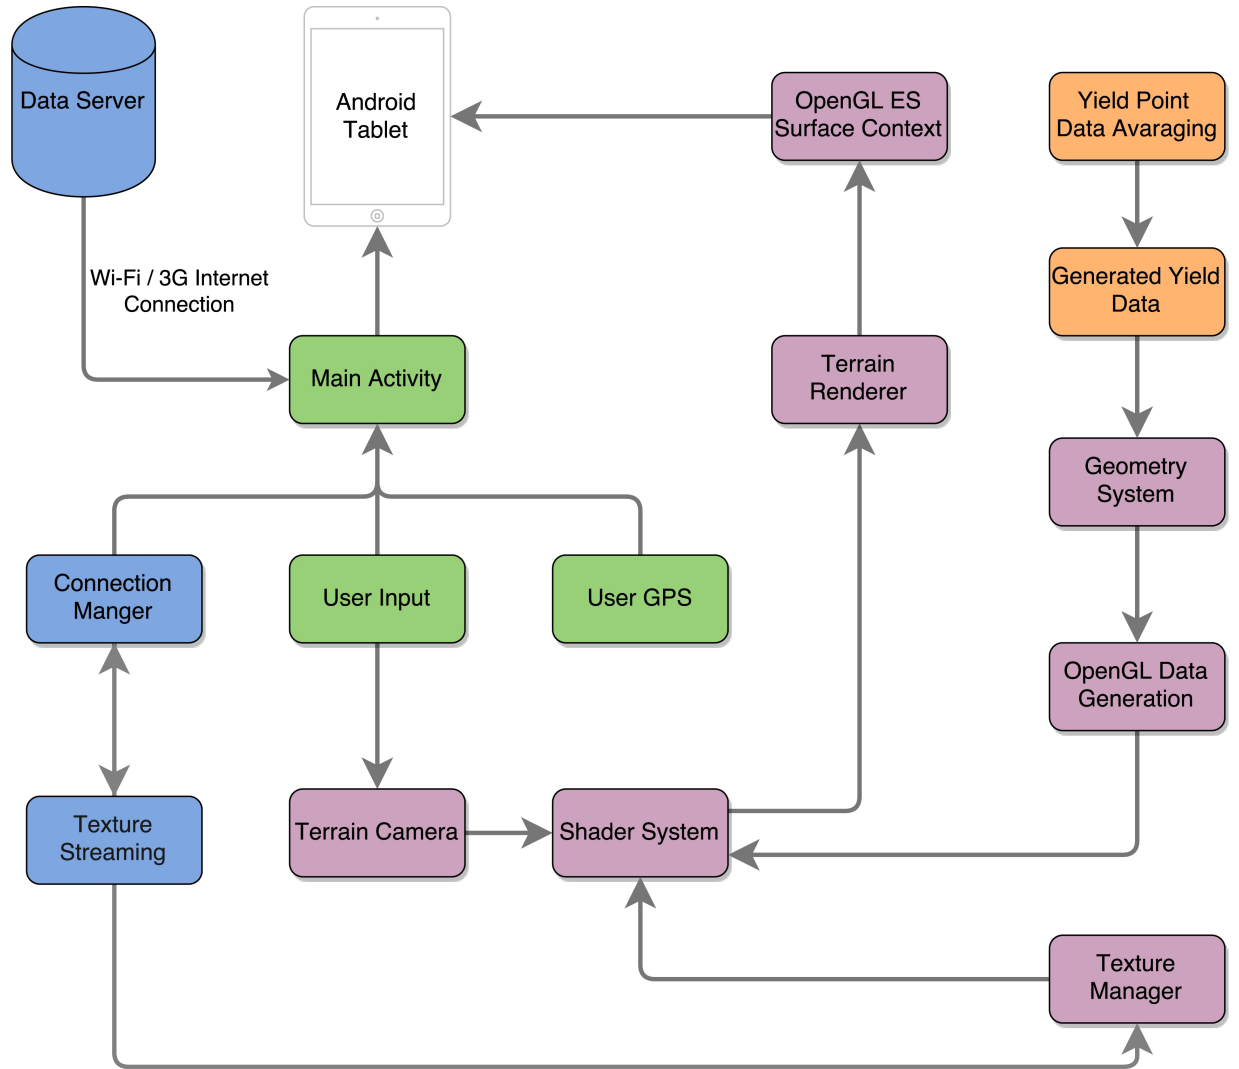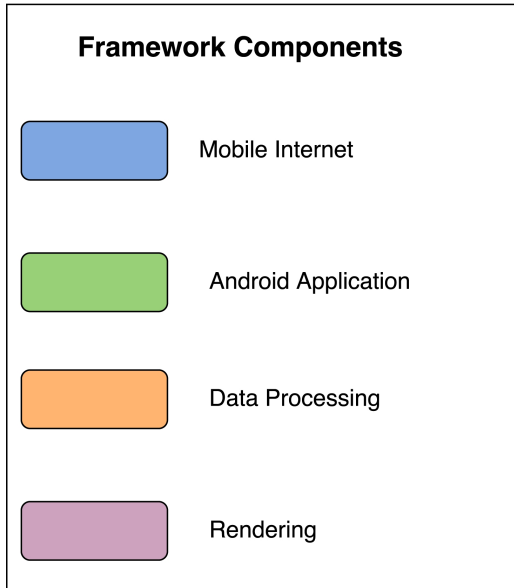

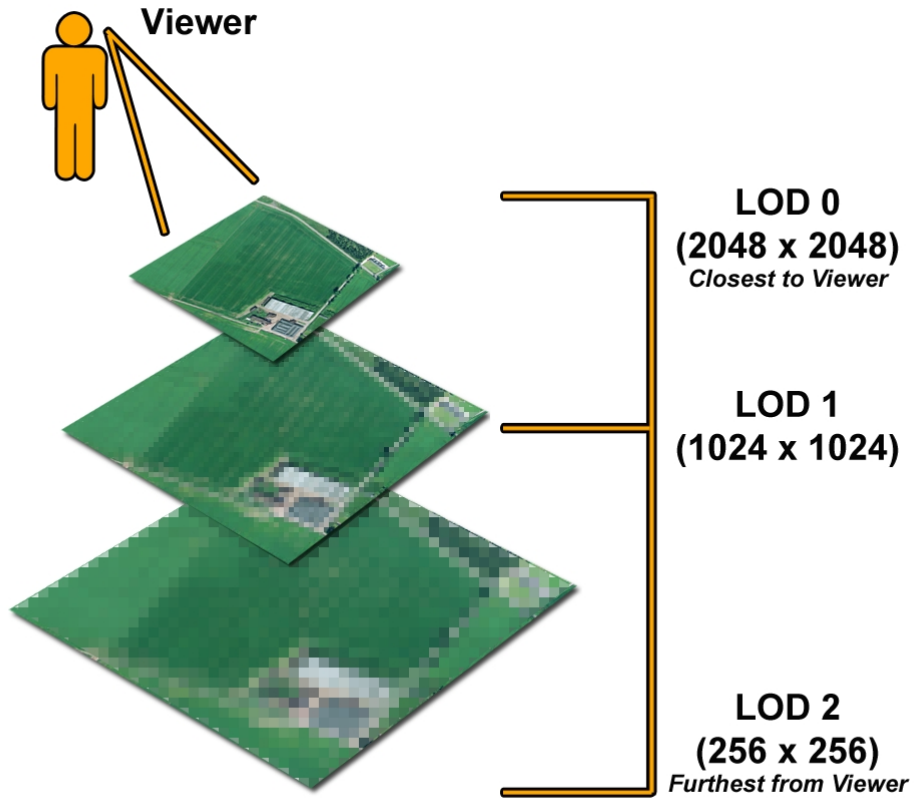

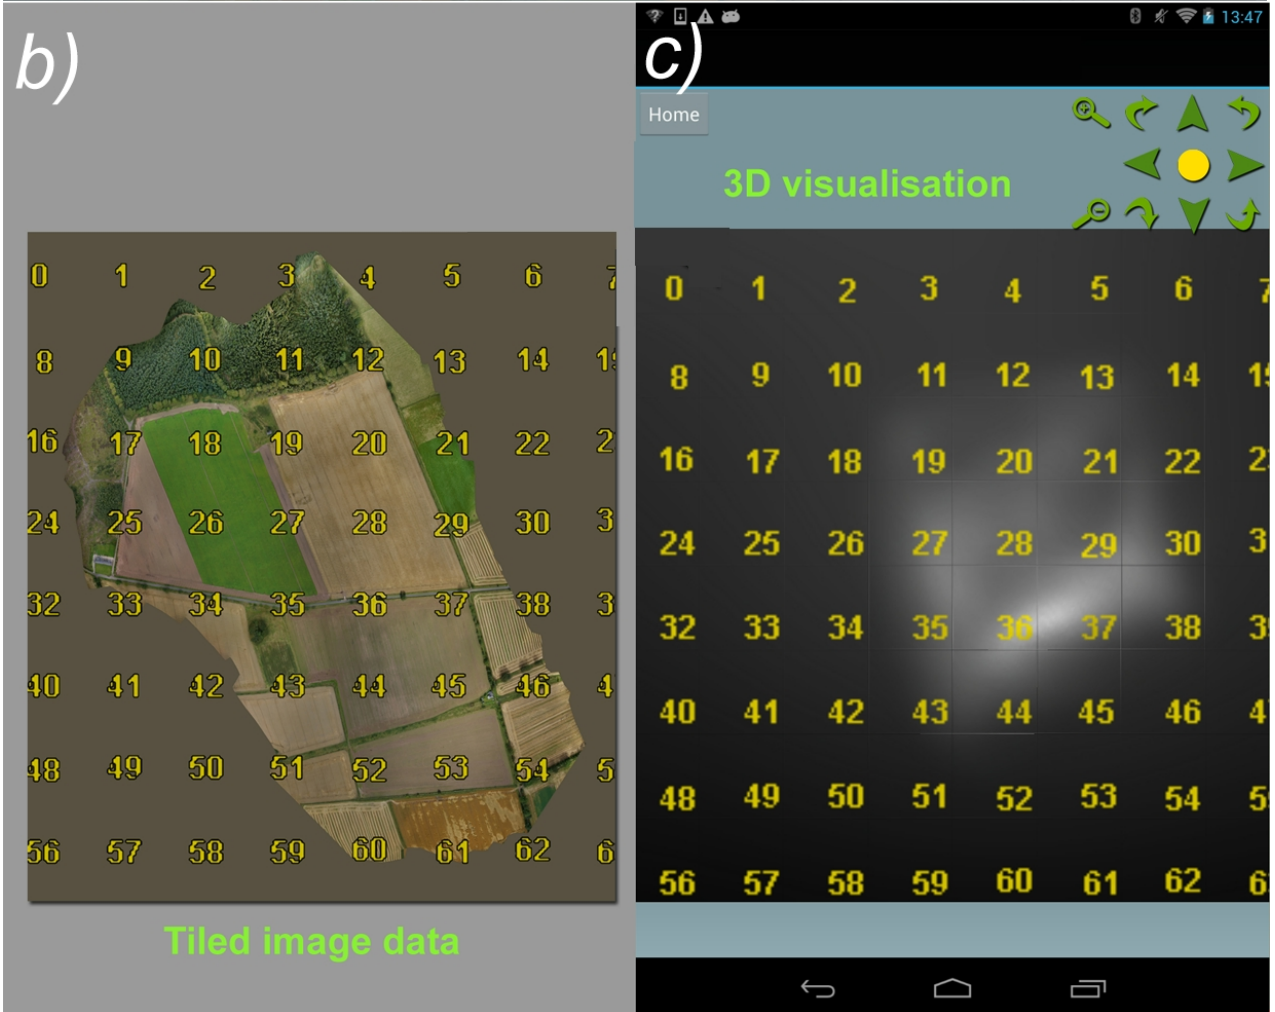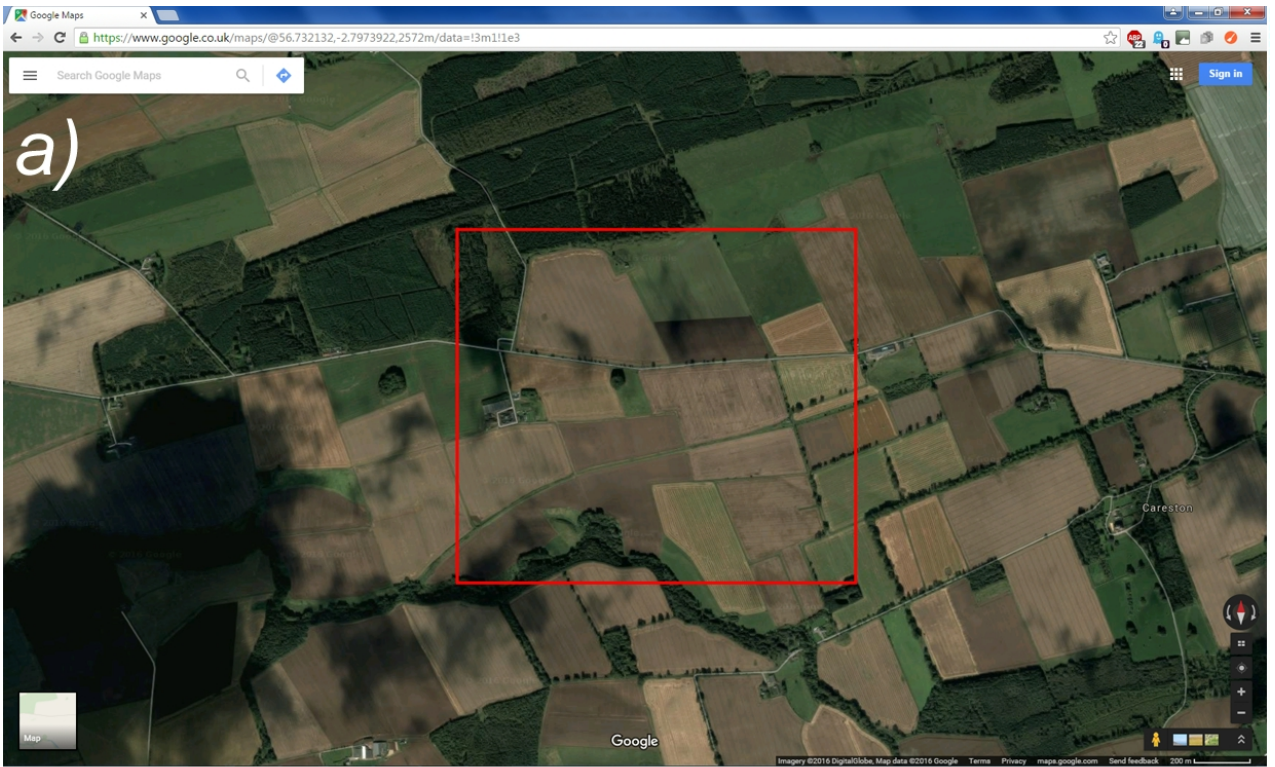

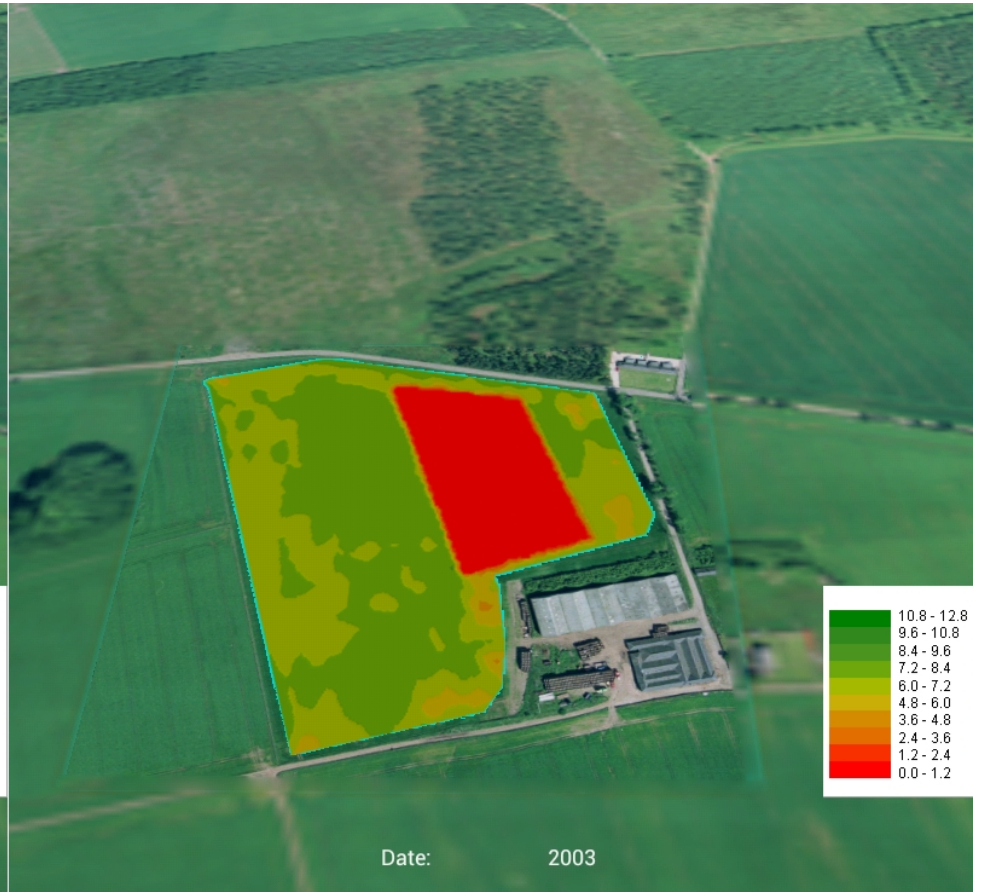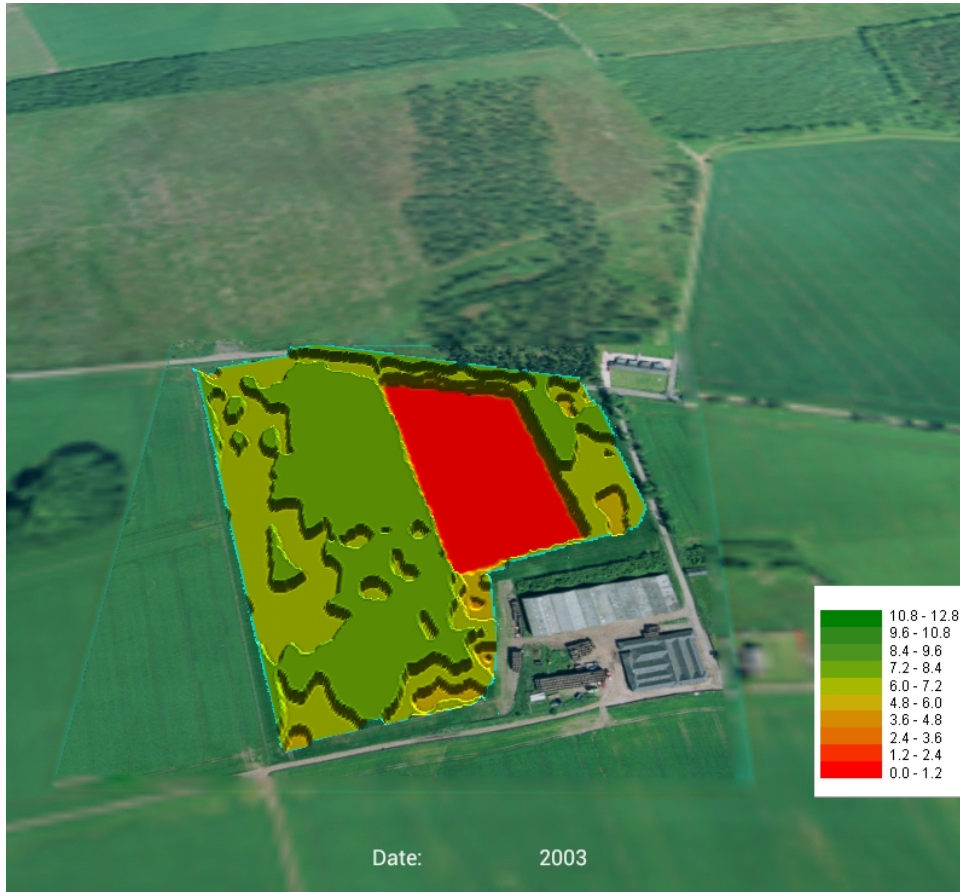


Se 3D Soil Essentials 3D

Home

Navigation

Latitude: 56.733030, Longitude: -2.807876

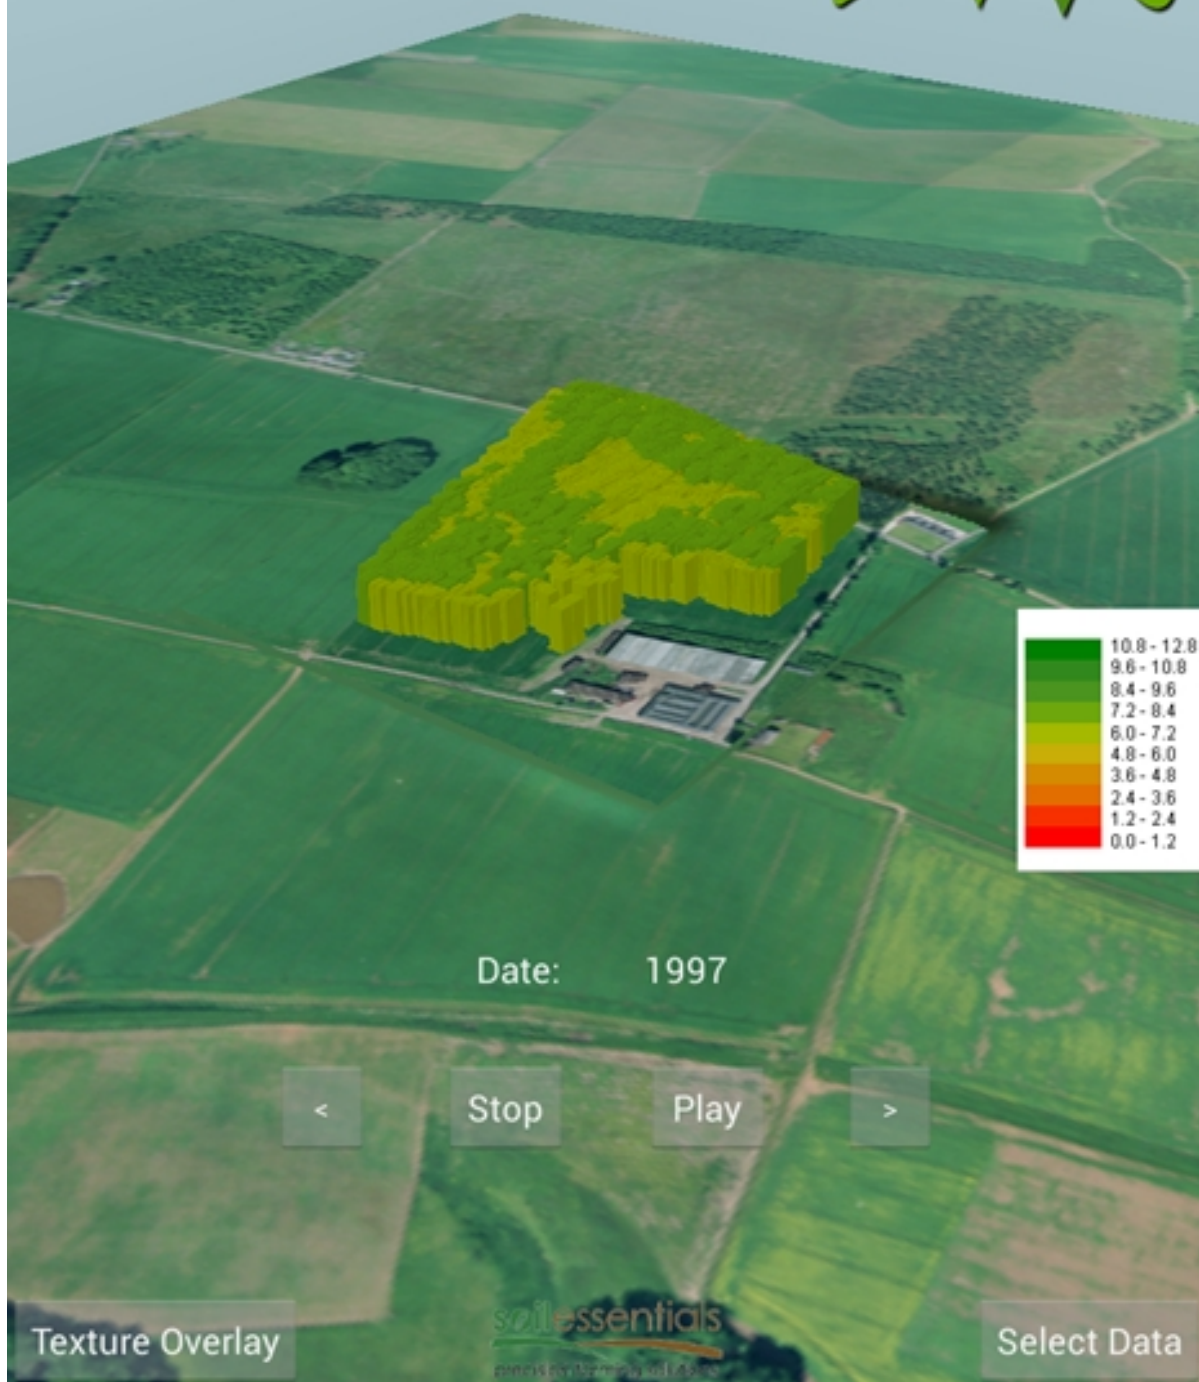

Date: 1997




Stop

Play






Texture Overlay



Select Data



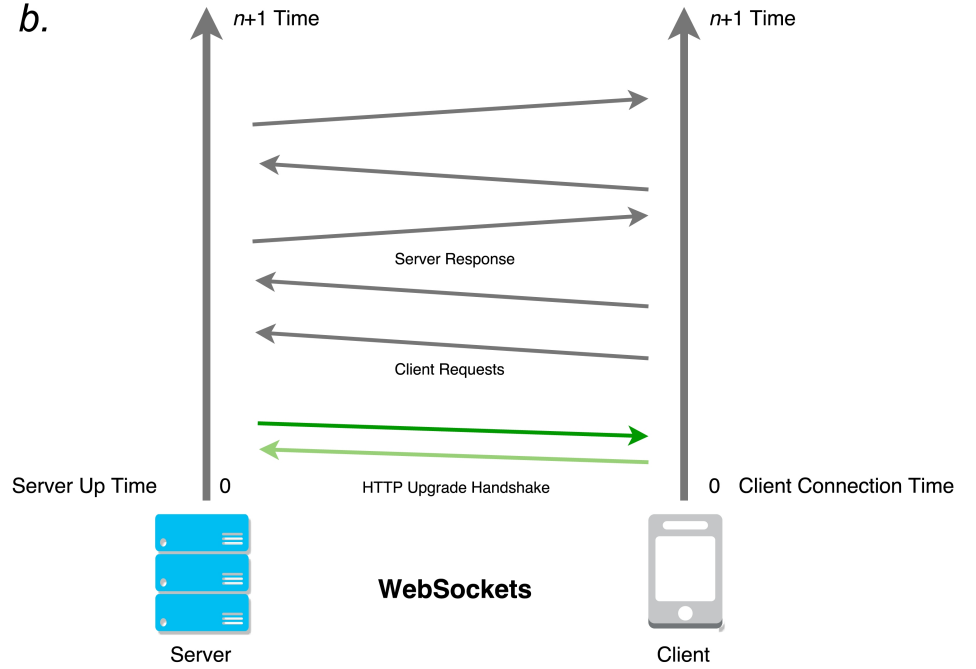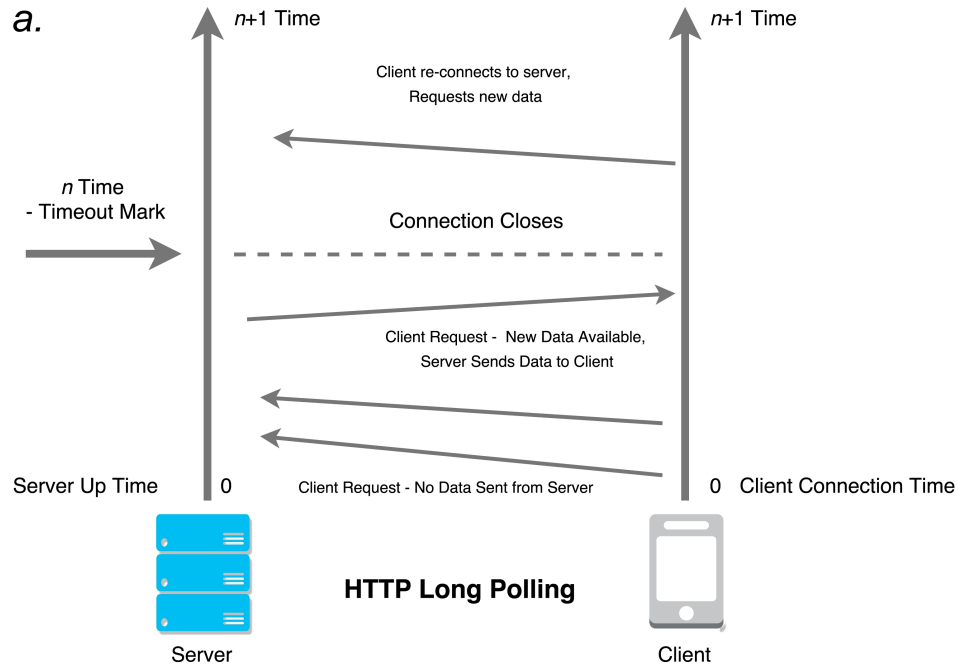

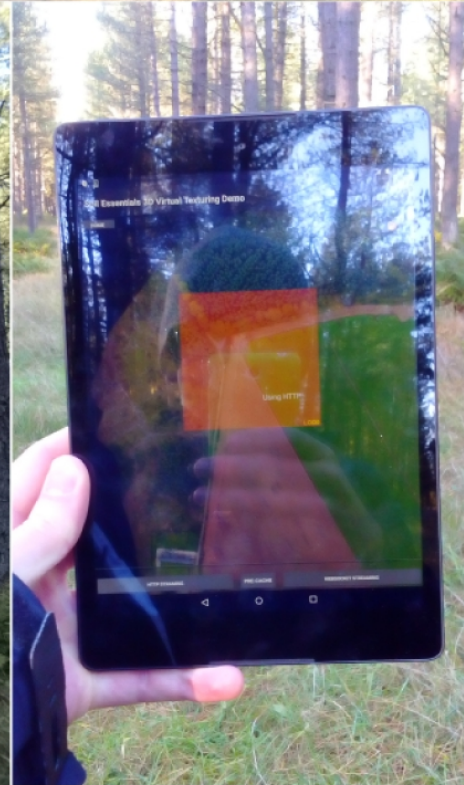




Home

Navigation

Latitude: 56.733030, Longitude: -2.807876

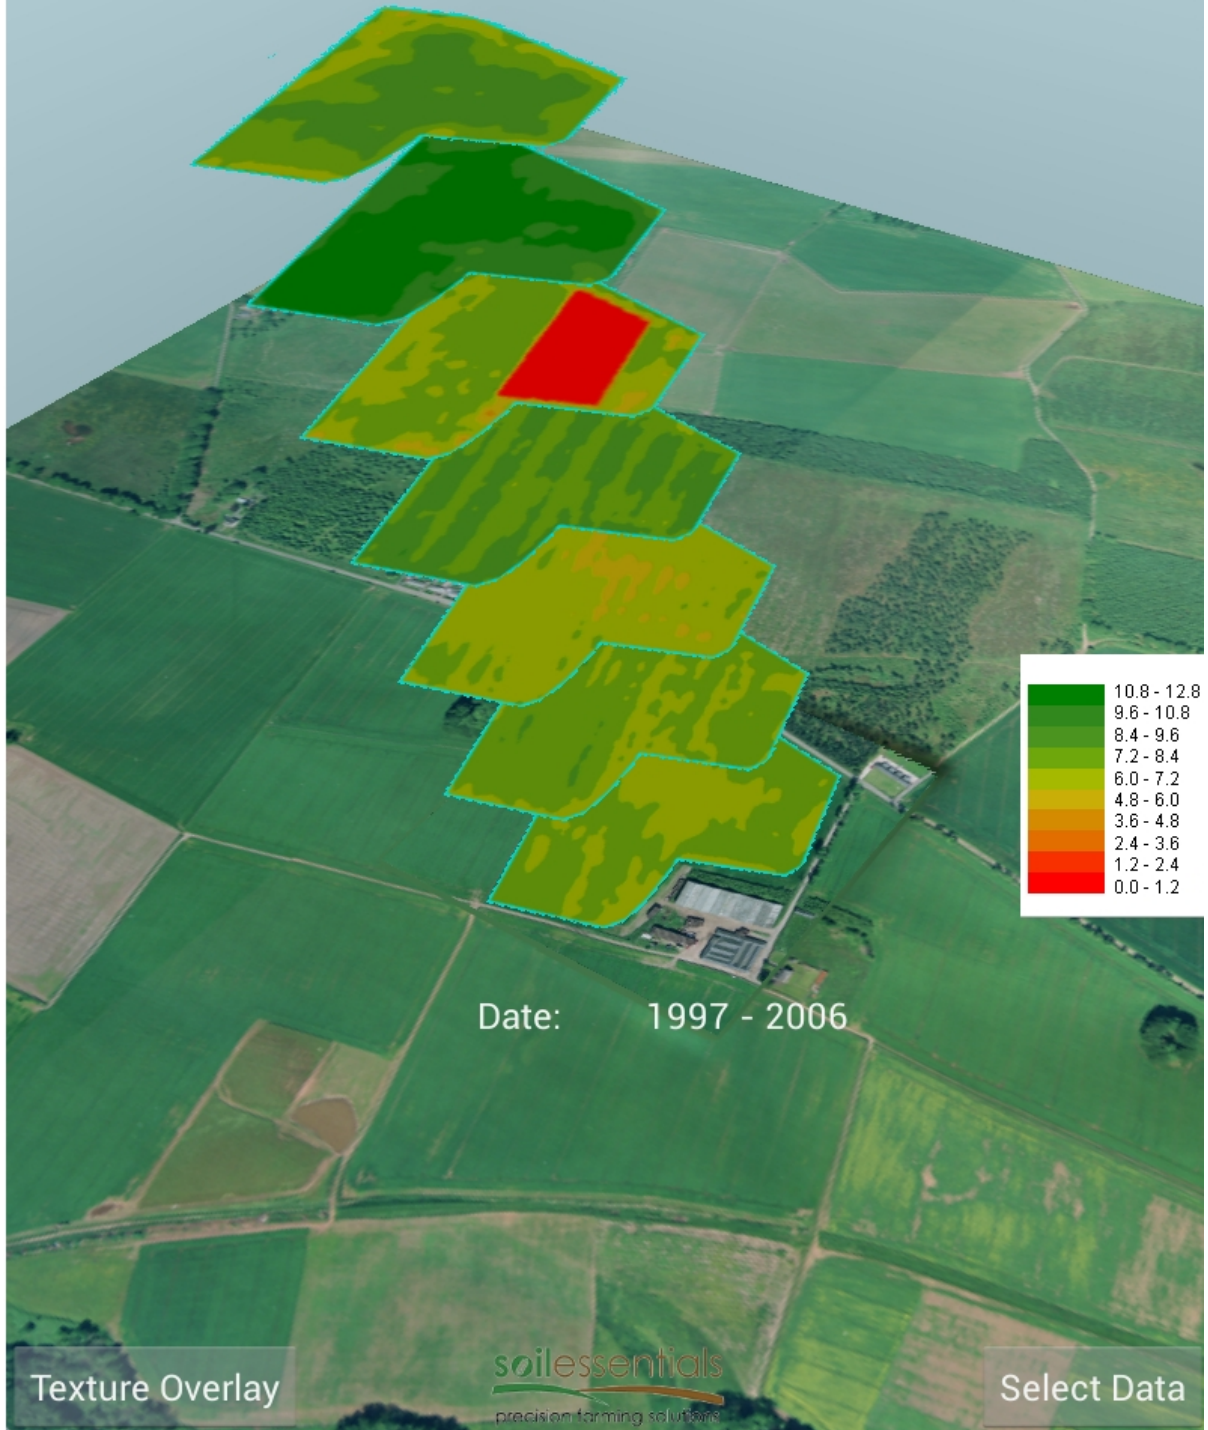


Date: 1997 - 2006


Texture Overlay




Select Data

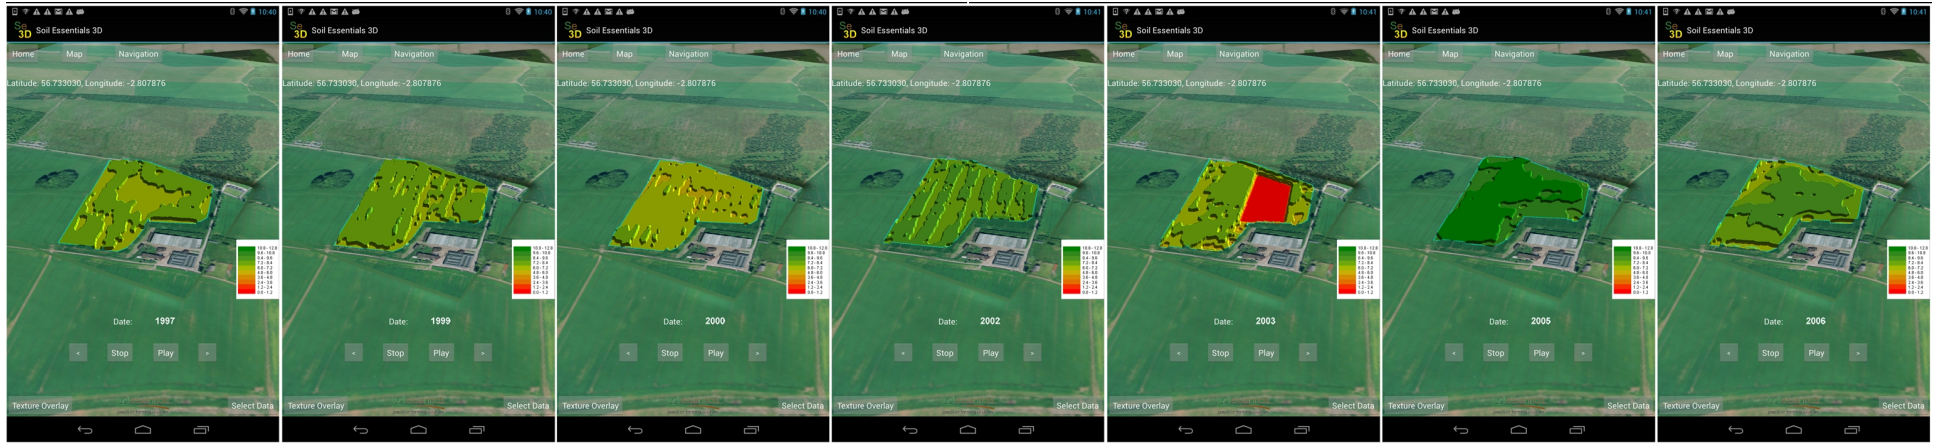


Visualisation Method Performance Results - Average Frames per Second (FPS)

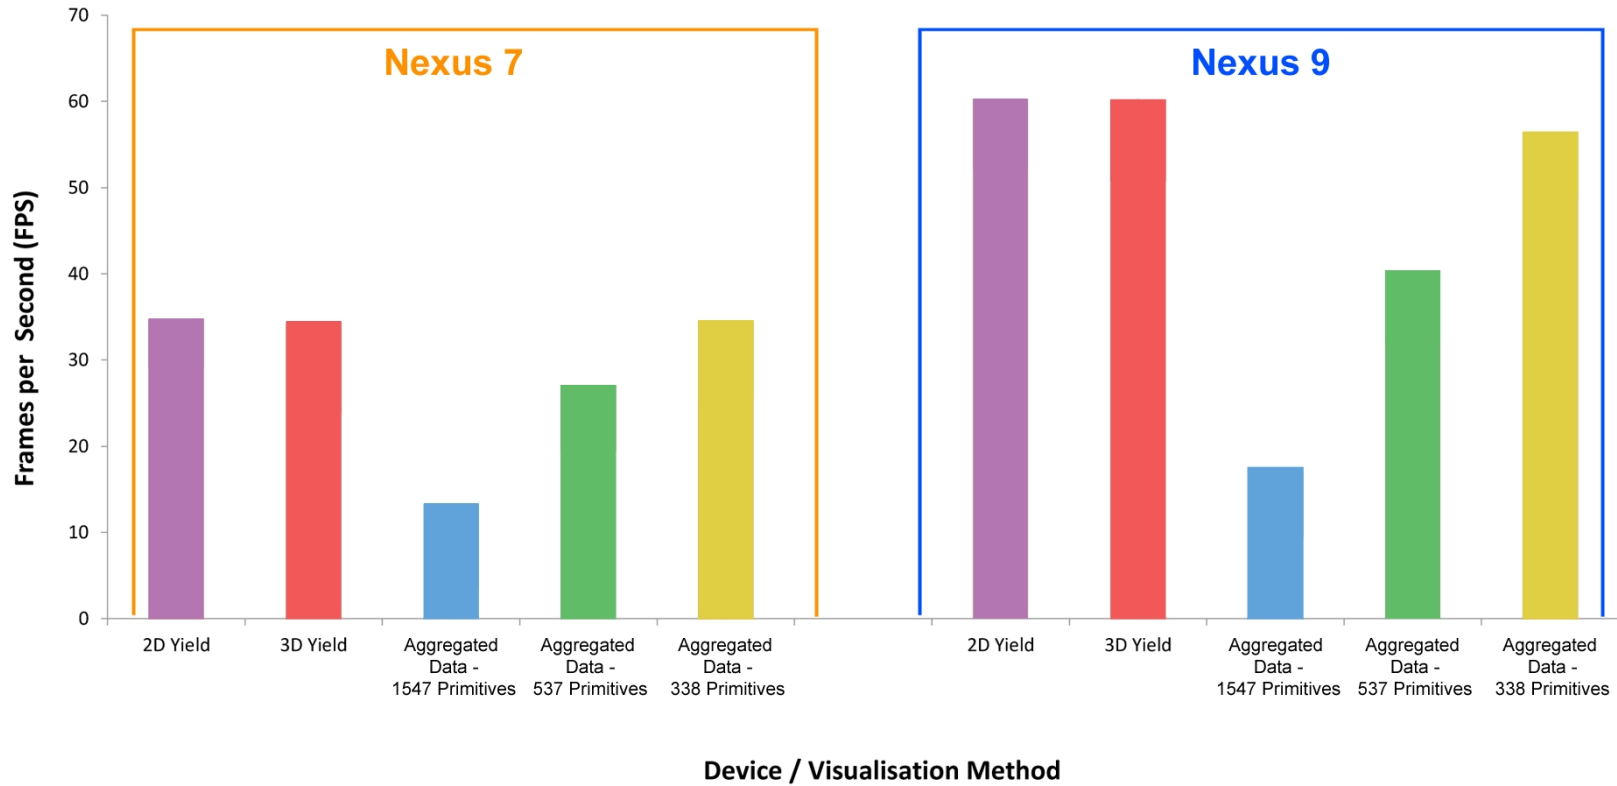


Visualisation Method Performance Results - Average Milliseconds per Frame (MFPS)

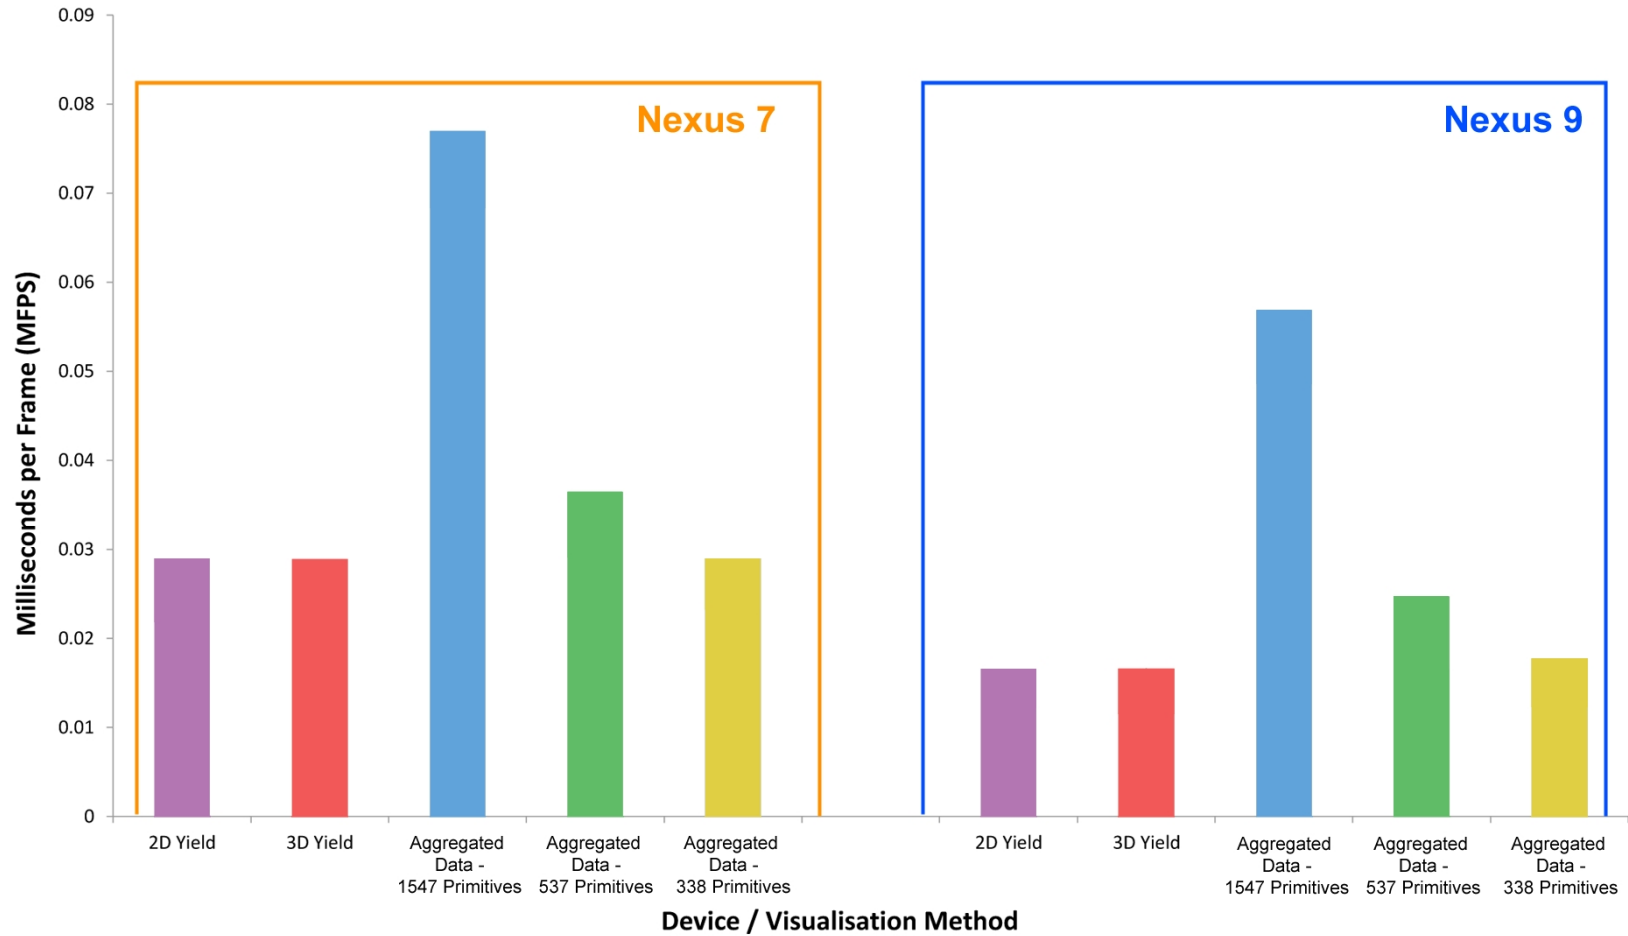


Visualisation Method Performance Results - Average RAM Usage

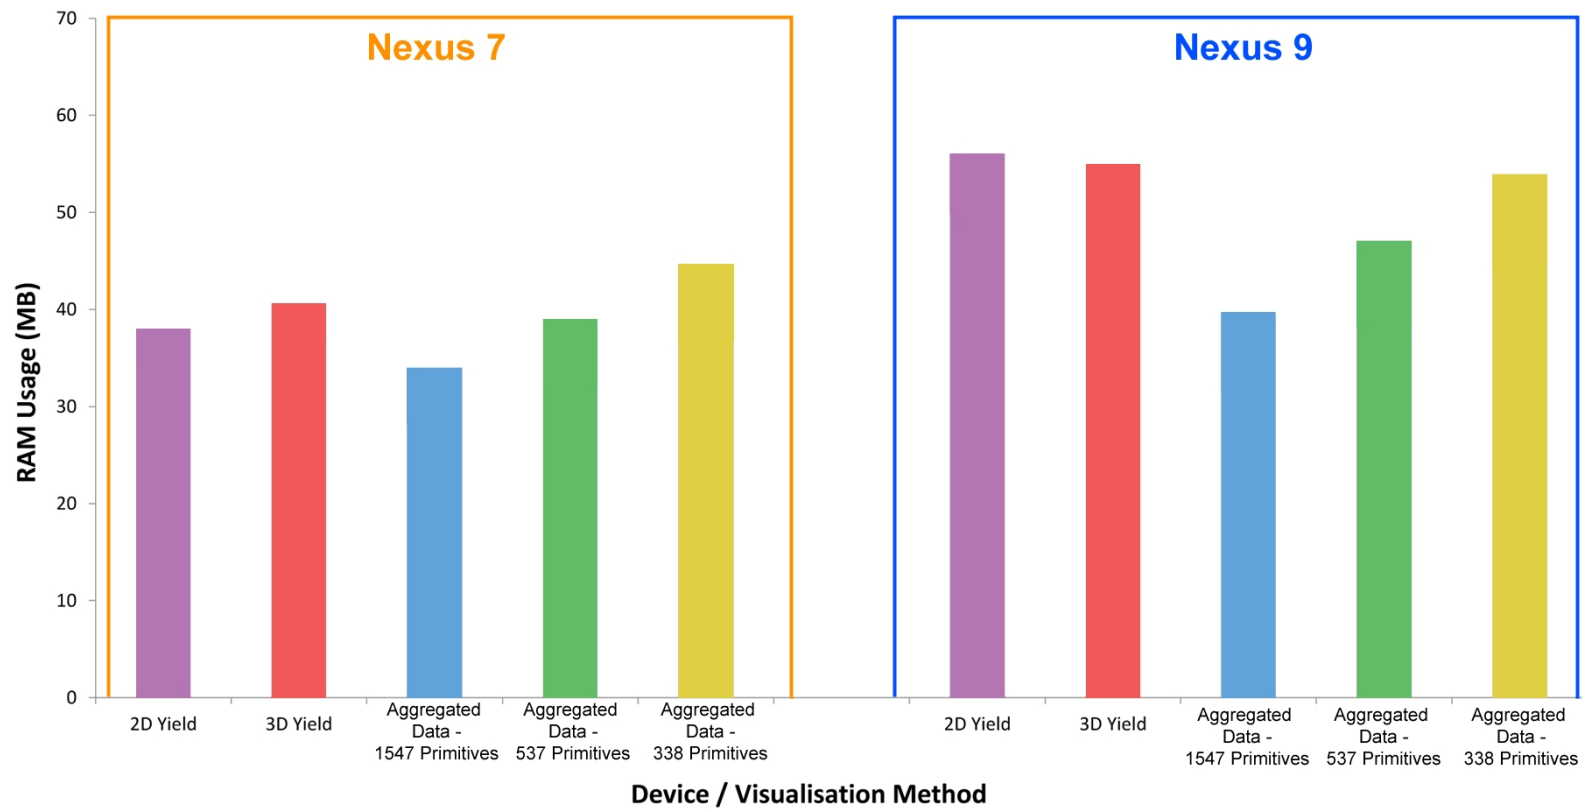

Visualisation Method Performance Results - Average CPU Usage

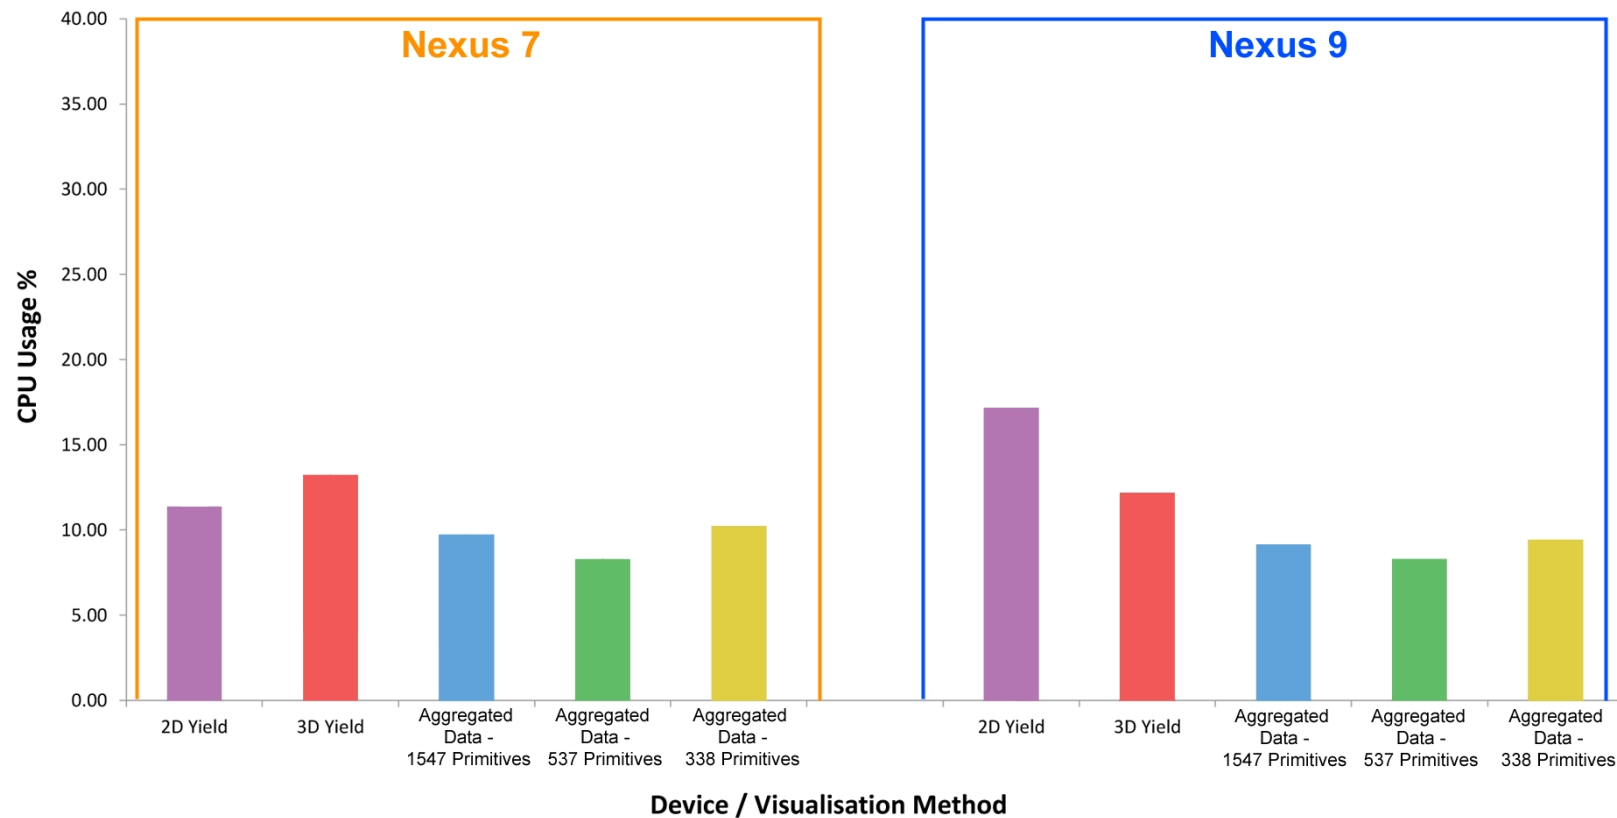

Nexus 9 - Connectivity Performance Results

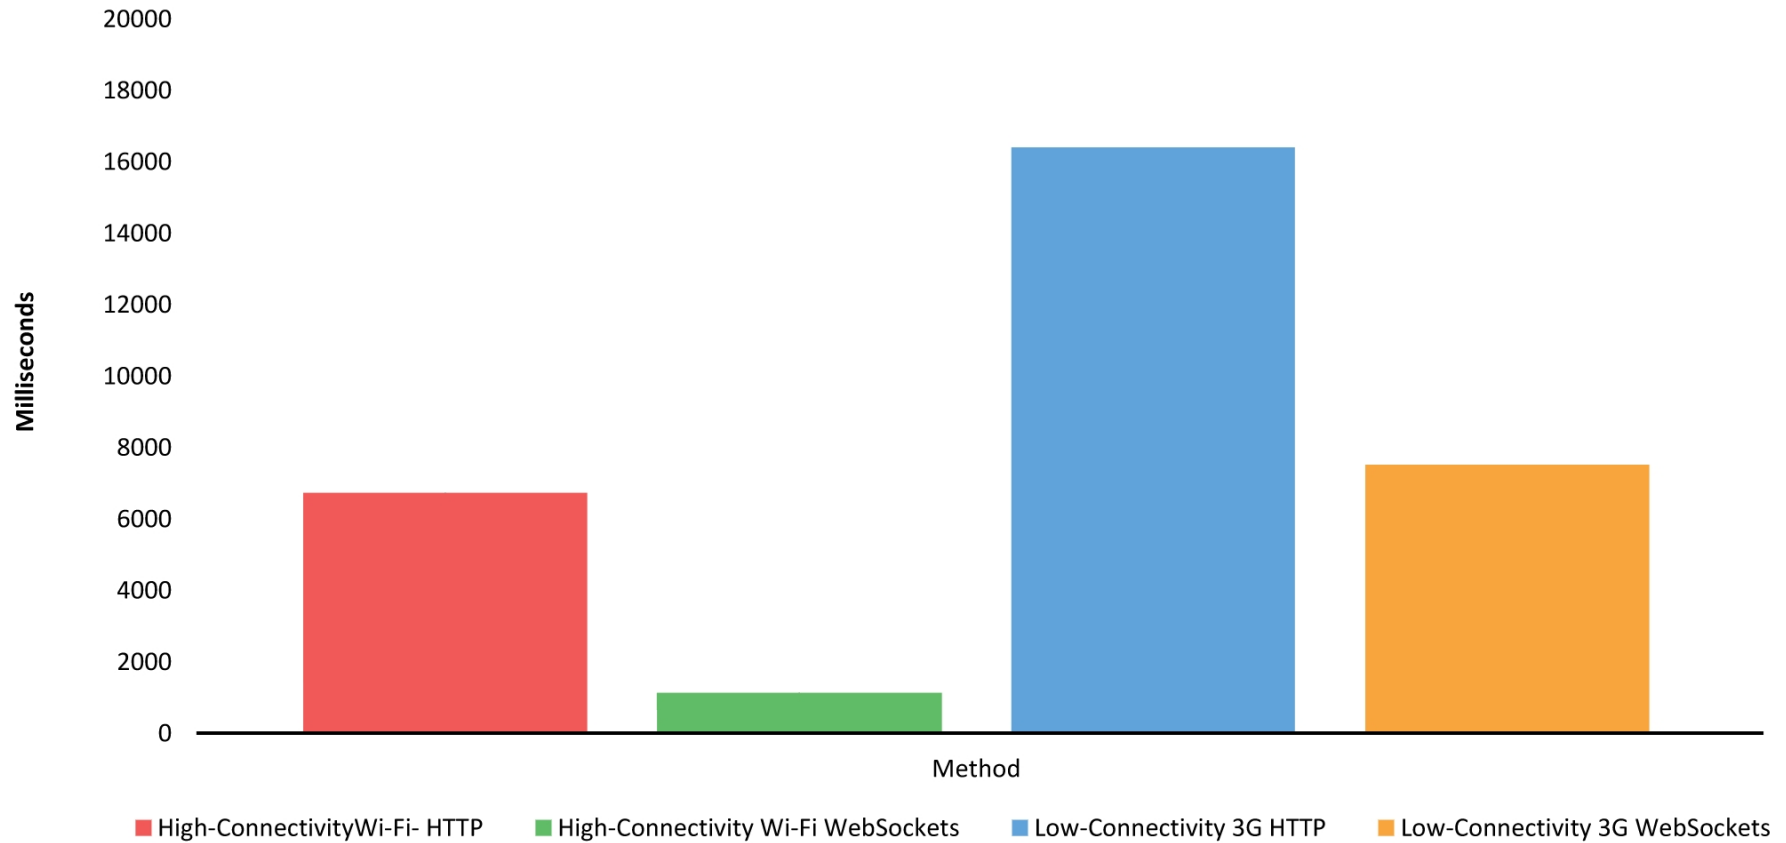

Question 2.12

Using the visualisation method of your choice and time scrolling feature can you identify the year with the least yield? Please write in the answer below:

Section 4 – Overall Impact

Question 4.1 – Briefly state what you like most about the app:

Question 4.2 – Briefly state what you most dislike about the app:

Question 4.3 – What do you think can be improved?

Question 4.3 – What do you think can be added as a new feature?

Question 4.6 – Would you use this app in the field?

Question 4.7 – Do you find this app practical to use?

Question 4.8 – Does this app address all of your needs for visualising yields in your fields?

Question 4.9 – Would you use this app on a phone or a tablet?

Question 4.10 – How often would you use this app?

End of Questionnaire

Thank you for your time!

Highlights

A mobile app for delivery of context aware data for crop monitoring and scouting is presented

Data intensive streaming methods were evaluated for delivering in-field Agri-Data

Customisable interactive 3D visualisation methods were evaluated for displaying Agri-Data

Testing highlights that different users prefer different 3D interactive visualisation methods

Testing highlights that data streaming and rendering is possible in low connectivity environments

SoilEssentials Android App

Testing Session Questionnaire

Name:


Occupation:

Date:


For each of the following questions, unless stated otherwise, please select a preference on a scale of 1 to 5, where 1 is least preference and 5 is most.

Section 1 – Usability


Question 1.1 – Do you find it easy to navigate around the scene in 3D?




Question 1.2 – Do you find the use of screen buttons helpful for controlling the navigation? The buttons are:




Question 1.3 – Can you navigate to the 4 corners of the scene without any problems?




Question 1.4 – Is the user interface easy to understand?




Question 1.5 – Is the user interface easy to use?




Question 1.6 – Can you select the different visualisation options easily?



Question 1.7 – Briefly state what you LIKE the most about the user interface:




Question 1.8 – Briefly state what you DISLIKE the most about the user interface:




Section 2 – Visual Preference


Question 2.1 – Do you like the initial start-up view?




Question 2.2 – Can you recognize the location of a farm and its outbuildings in the represented 3D view?



Question 2.3 – Is the aerial photography on the 3D terrain model clear to distinguish features of interest i.e. fields, houses, vegetation?




Question 2.4 – Do you prefer a top down view of the land area or a tilted 3D view?




Question 2.5 – Briefly state what you LIKE the most about the 3D terrain model:

Question 2.6 – Briefly state what you DISLIKE the most about the 3D terrain model:


Question 2.7 – Do you find the 3D aggregated data visualisation visually appealing?



Question 2.9 – Do you find the 3D and 2D yield point data visualisations visually appealing?



Question 2.10 – Do you prefer the 2D point yield map visualisation or the 3D point yield map visualisation?



Question 2.11 – In the box below, can you please rank each of the visualisations from 1 – 4, where 1 is highest preference and 4 is lowest preference:

3D Aggregated Data - Peaks	
3D Aggregated Data - Bars	
2D Point Yield Data	
3D Point Yield Data	